




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

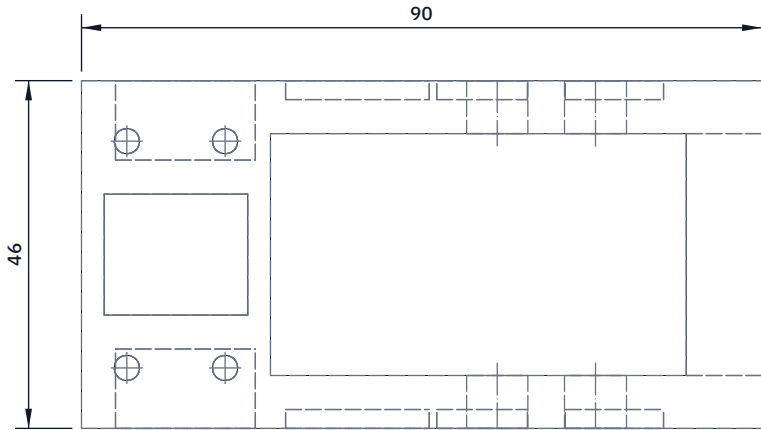


TOP VIEW
Scale 1:1; looking down (along -Z)

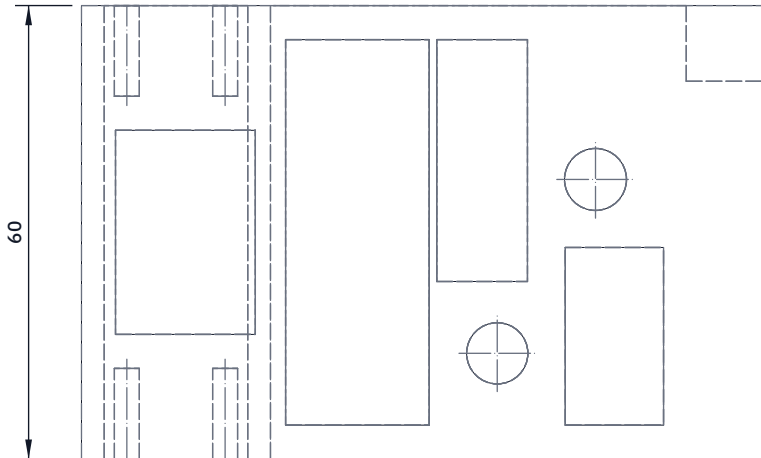

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

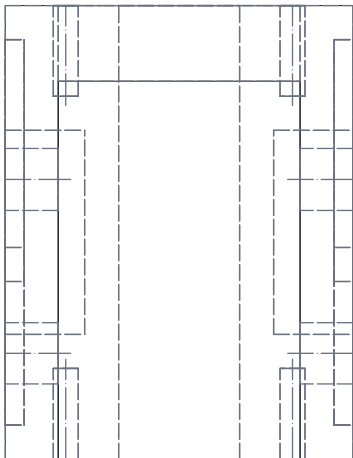

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

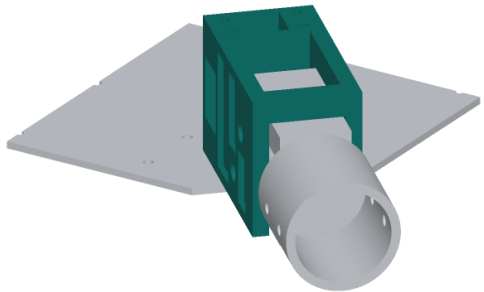

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Block 90 long x 46 wide x 60 high; inner end 125 from the hub centre

Clevis slot 32 wide, from 25 in from the inner end to the outer end

Slot open below and above, except the stop bridge 10 x 10 across the top at the outer end

Pivot hole 8.05 reamed, 14 up from the bottom, 55 from the inner end

Lock-pin hole 8.1, 37 up, 68 from the inner end

Four M4 x 10 deep tapped holes top and bottom, 6 and 19 from the inner end, 15 either side

Pocket 19 x 16 through between the bolt holes to save weight

Side pockets 18.5 x 27 from each side, 4.5 from the centre pocket,

clear of the bolt holes by 4.5; cheek pockets 2.5 deep beside the pins

Deburr; the stop bridge underside must be flat: it carries the arm's lift

Check: an 8 mm pin slides through both pivot holes and both lock holes

KITEWRIGHT LIFT

github.com/BoujeeEnjinia1701/kitewright-lift

Arm hinge block: making sketch

DRAWING NO. KWL - DWG - 104		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES 6061-T6 aluminium bar 50 x 50, machined				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	