



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

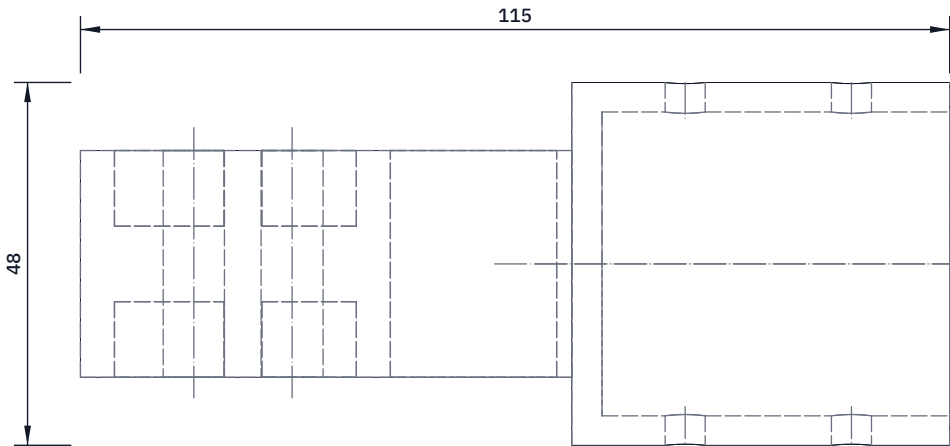


TOP VIEW

Scale 1:1; looking down (along -Z)

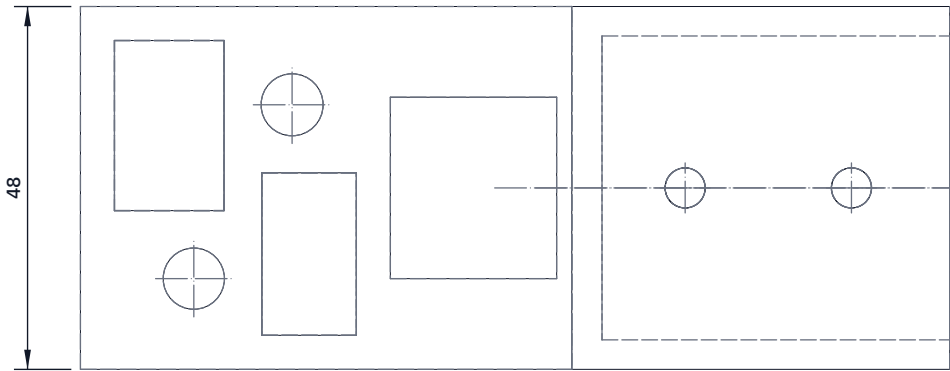


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

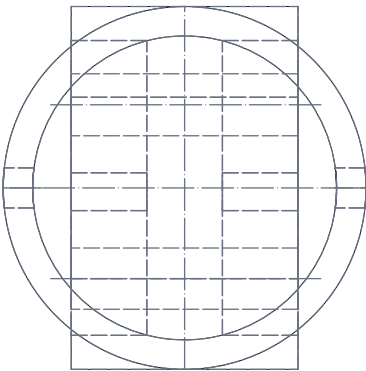

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

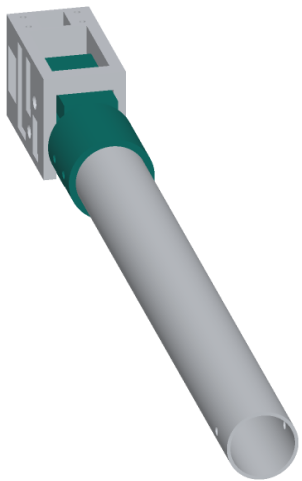

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Tongue 65 long x 30 wide x 48 high; collar 48 OD x 50 long on its outer end
- Collar bore 40.2, 45 deep, on the tongue's centre height
- Pivot hole 8.05 reamed, 12 up from the tongue's bottom, 15 from its inner end
- Lock-pin hole 8.1, 35 up, 28 from the inner end
- Window 22 x 24 through the tongue, 41 to 63 from its inner end
- Side pockets 10 deep each side (10 centre web), 4.5 clear of both pin holes
- Two 5.2 cross holes through the collar, 15 and 37 from its inner end
- Top face of the tongue's outer end flat: it bears on the stop bridge
- Check: the tongue swings freely in the hinge block slot with 1 mm each side

KITEWRIGHT LIFT

github.com/BoujeeEnjinia1701/kitewright-lift

Arm root fitting: making sketch

DRAWING NO. KWL-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 6061-T6 aluminium, machined in one piece					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand