




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	KWL-DDR-003: side pockets, cheek window and cuts	2026-10-03	AC

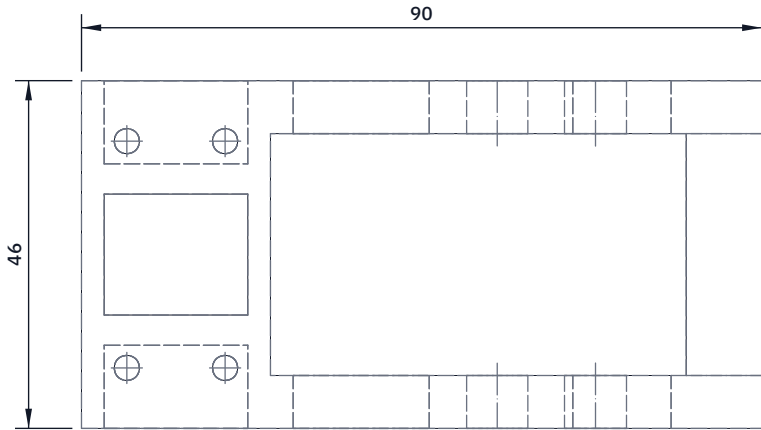


TOP VIEW
Scale 1:1; looking down (along -Z)

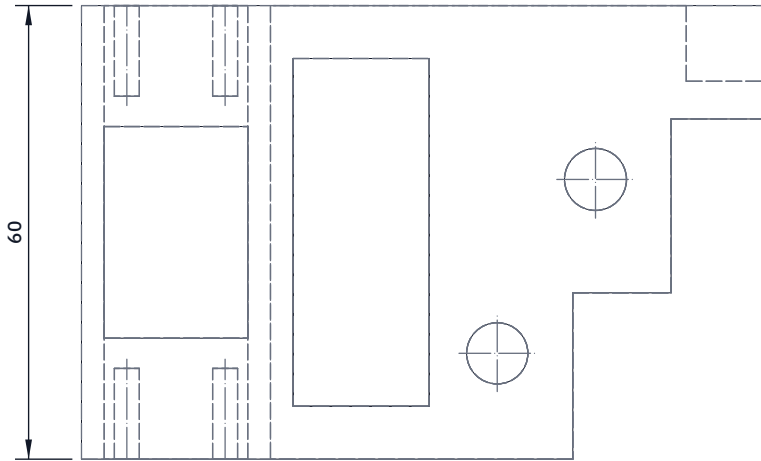

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

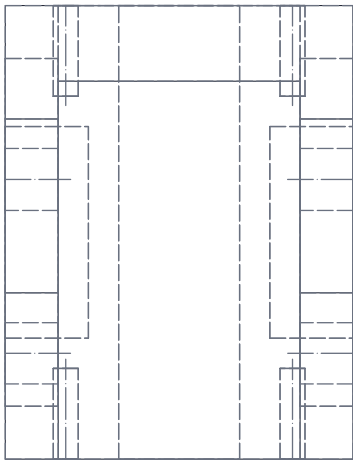

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

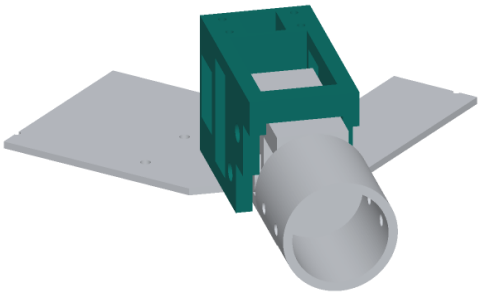

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Block 90 long x 46 wide x 60 high; inner end 125 from the hub centre
- Clevis slot 32 wide, from 25 in from the inner end to the outer end
- Slot open below and above, except the stop bridge 10 x 10 across the top at the outer end
- Pivot hole 8.05 reamed, 14 up from the bottom, 55 from the inner end
- Lock-pin hole 8.1, 37 up, 68 from the inner end
- Four M4 x 10 deep tapped holes top and bottom, 6 and 19 from the inner end, 15 either side
- Pocket 19 x 16 through between the bolt holes; side pockets 19 long x 11 deep, 16 to 44 up, each side
- Window 18 x 46 through both cheeks, 28 to 46 from the inner end, 7 to 53 up
- Cheeks cut away below 22 up from 65 to 78 from the inner end, and below 45 up from 78 to the outer end
- Leave 4 to 5 walls round every hole; deburr; the bridge underside is flat: it carries the arm's lift
- Check: an 8 mm pin slides through both pivot holes and both lock holes

KITEWRIGHT LIFT				github.com/BoujeeEnjinia1701/kitewright-lift			
Arm hinge block: making sketch							
DRAWING NO. KWL - DWG - 104			REV P2		SHEET 1 of 1		SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES 6061-T6 aluminium bar 50 x 50, machined							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			