




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC
P2	KWL-DDR-003: clamp shortened to 40	2026-10-03	AC

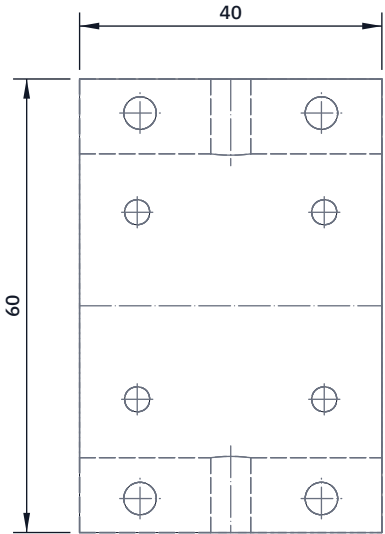


TOP VIEW
Scale 1:1; looking down (along -Z)

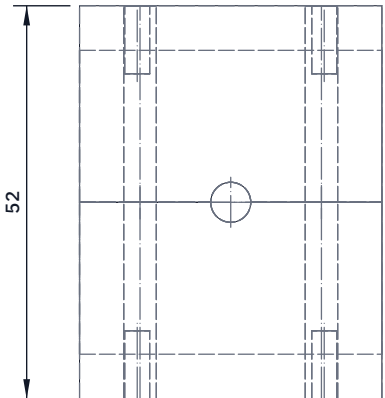

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

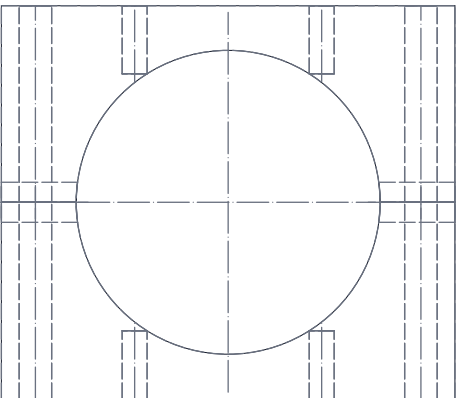

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

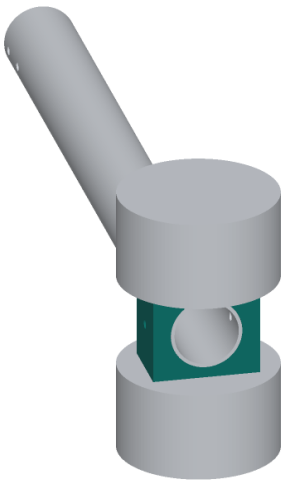

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Block 40 x 60 x 52, bored 40.2 through on the split line, then sawn in two
- Four 4.3 holes 8 in from the ends and 4.5 in from the sides, through both halves
- Each outer face: four M4 x 9 deep on a 35 circle at 45 deg, for the motor bought
- 5.2 cross hole through both halves and the tube at the motor axis
- Face both halves flat so they close on the tube with 0.5 to 1 gap
- Check: the motor axis is square to the tube within 1 deg

KITEWRIGHT LIFT				github.com/BoujeeEnjinia1701/kitewright-lift			
Motor mount: making sketch							
DRAWING NO. KWL - DWG - 107			REV P2		SHEET 1 of 1		SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES 6061-T6 aluminium, two halves machined together							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	