


CONCEPT, NOT FOR FABRICATION


Kitewright Lift · github.com/BoujeeEnjinia1701/kitewright-lift

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from the TRL 3 model	2026-10-03	AC
P2	KWL-DDR-002: design for construction	2026-10-03	AC

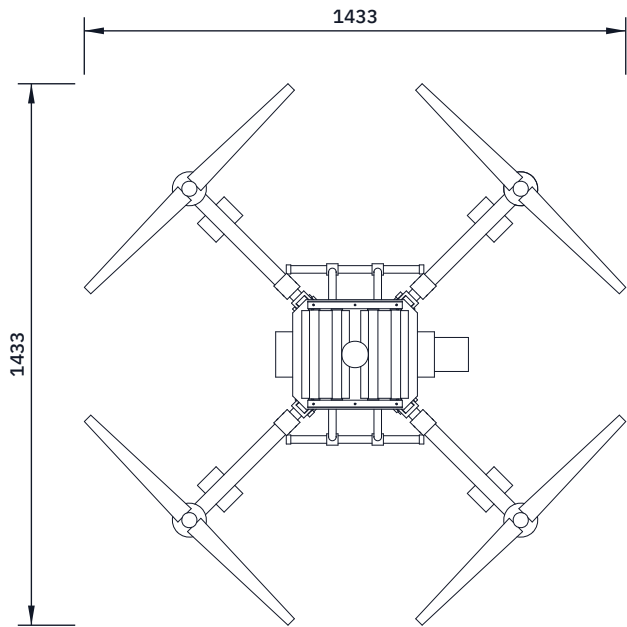


TOP VIEW

Scale 1:20; looking down (along -Z)

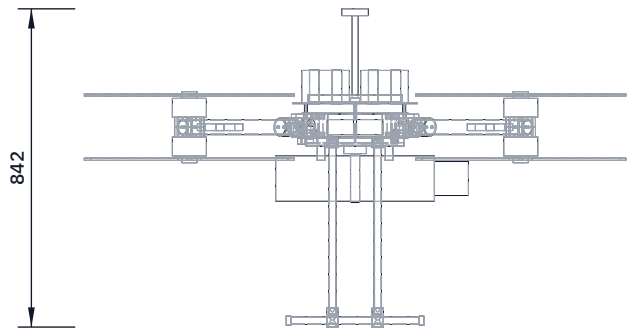


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

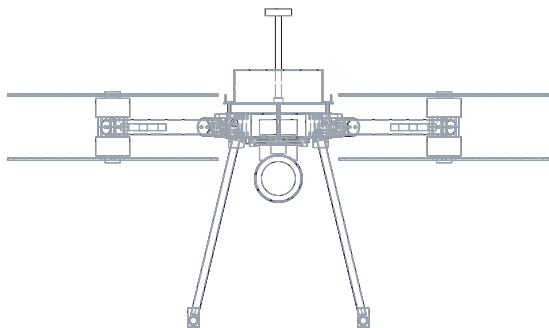

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

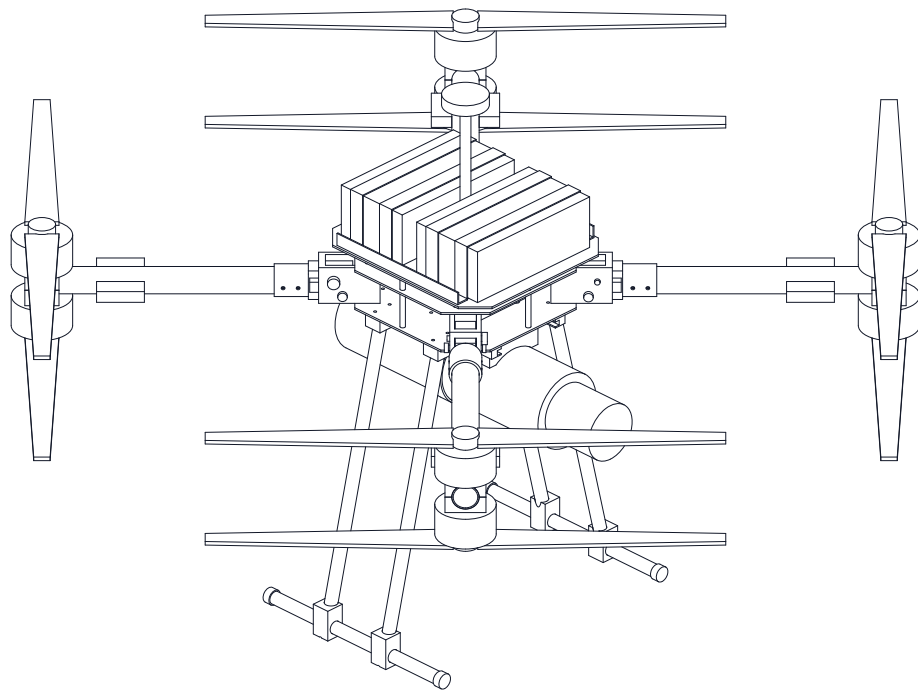

ISOMETRIC VIEW

Not to scale; float release payload fitted; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

- Motor axes 620 from the centre on the diagonals; 1,240 motor to motor
- Propellers 30 inch (762); tip gap 115; coaxial gap 170
- Hub plates 3 carbon, 280 square, 60 apart; underside 500 up
- Arm tube carbon 40 x 36; hinge pivot 180 from centre
- Arm stop bridge 30 outboard of the pivot; 8 lock pin
- Upper rotor plane 614 up; lower rotor plane 444 up
- Deck 330 x 290, top 594 up; packs 126 x 232 x 85
- Skids 340 long, 450 apart; struts 20 carbon
- Payload rails 260 long, 112 apart (Core); payload plate 124 wide
- GNSS puck top 842 above the ground
- Arms fold down about the pivot: see KWL-DWG-002
- Third-angle; front view from -Y; X forward; arms on the diagonals

KITEWRIGHT LIFT

github.com/BoujeeEnjinia1701/kitewright-lift

Coaxial X8 rescue multirotor: general arrangement

DRAWING NO. KWL - DWG - 001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Carbon plates and tubes, 6061-T6 fittings; bought parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand