


CONCEPT, NOT FOR FABRICATION


LaneSkiff · github.com/BoujeeEnjinia1701/laneskiff

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-10-03	AC

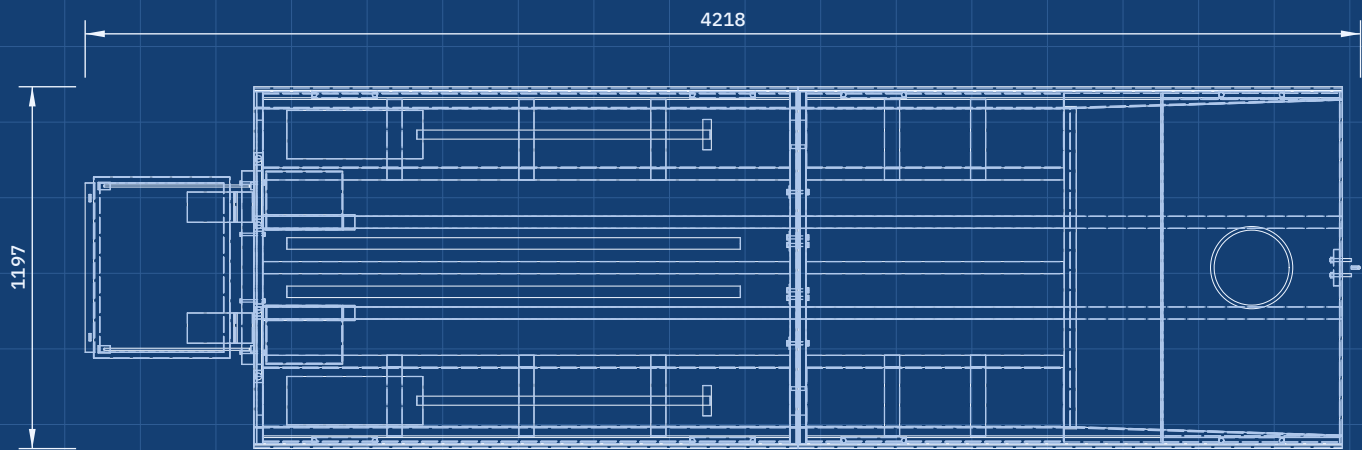


TOP VIEW

Scale 1:25; looking down (along -Z)

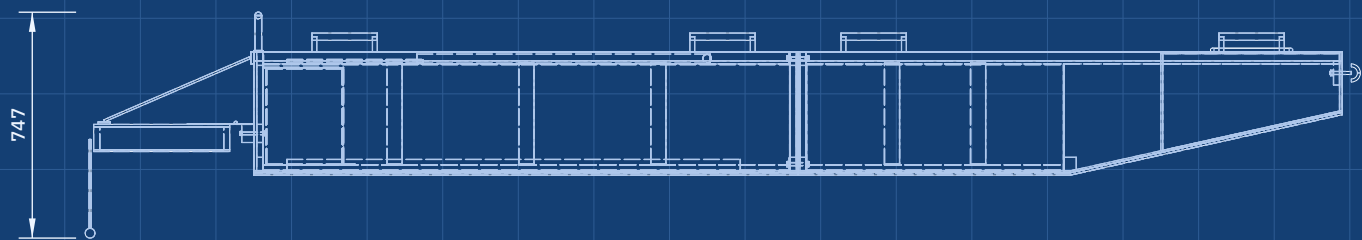


FRONT VIEW

Scale 1:25; looking at the front (along +Y)

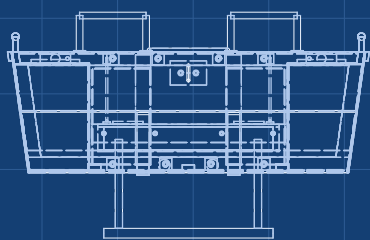

RIGHT VIEW

Scale 1:25; looking at the right side (along -X)

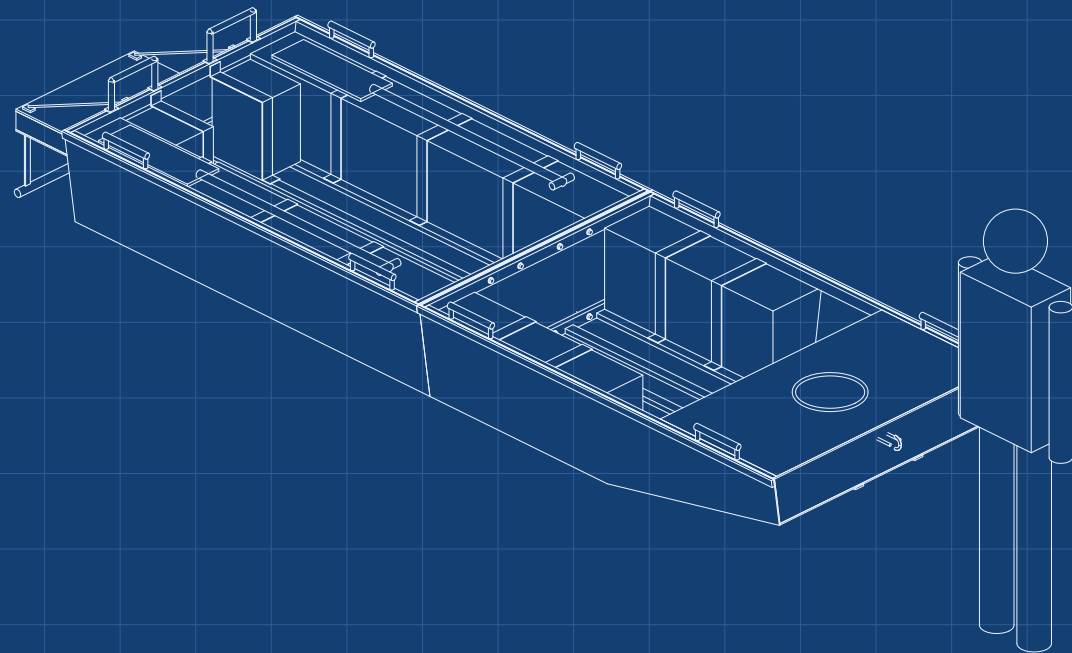

ISOMETRIC VIEW

Not to scale; figure is a 1.75 m person; seen from the front right and above, about 30 deg elevation

KEY FIGURES

- Hull 3.6 m long, 1.20 m beam over the rub strakes, 0.40 m deep; two halves of 1.8 m
- Hull 88 kg (halves 50 and 38 kg); okoume and epoxy
- Rated load five persons, 375 kg; deepest draft 148 mm
- Stern-step boarding heel 3.3 deg; over the side 12.8 deg
- Swamped with rated persons: afloat, 161 mm freeboard at the transom (30 L stern foam)
- Halves join with eight M10 bolts and one spanner in about 6 min (estimate)

LANESKIFF

github.com/BoujeeEnjinia1701/laneskiff

Two-piece flood rescue skiff with a stern boarding step concept

DRAWING NO. LSK-DWG-010		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:25	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha

MATERIAL / NOTES
Massing model for concept communication