



CONCEPT, NOT FOR FABRICATION

LaneSkiff · github.com/BoujeeEnjinia1701/laneskiff

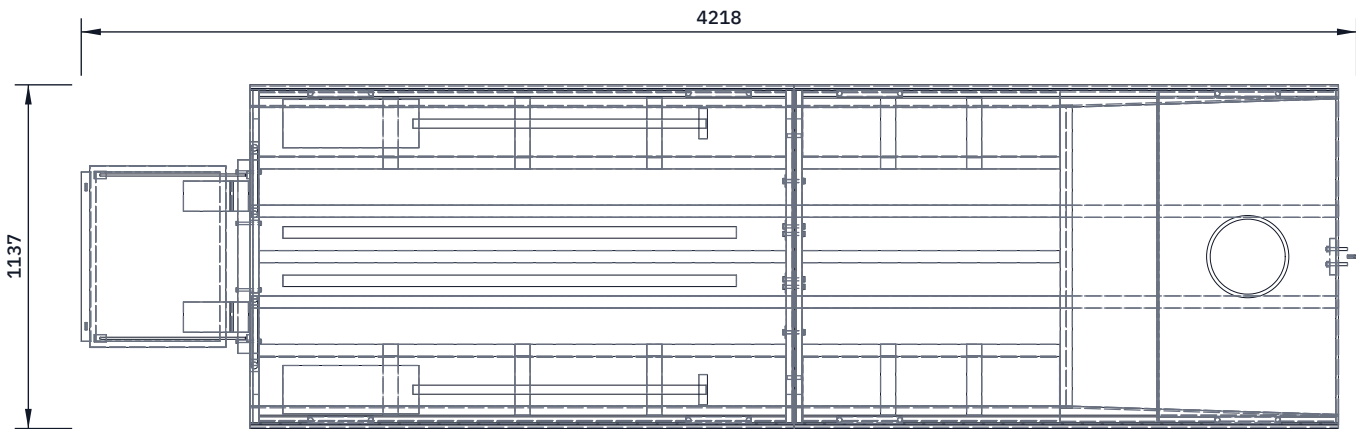


TOP VIEW

Scale 1:25; looking down (along -Z)

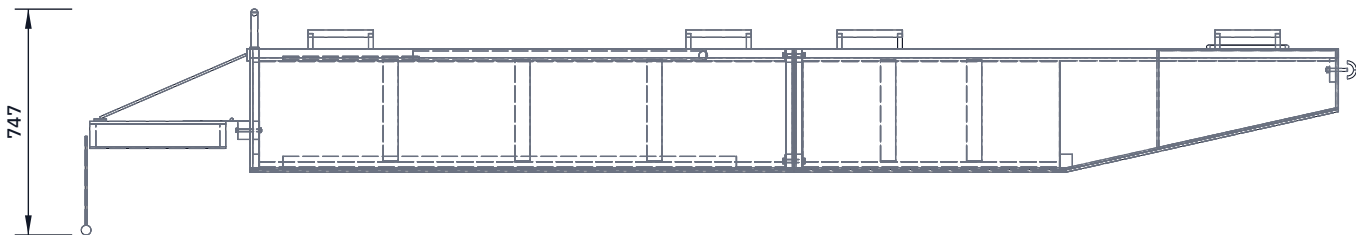

FRONT VIEW


Scale 1:25; looking at the front (along +Y)



RIGHT VIEW

Scale 1:25; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-10-03	AC
P2	LSK-DDR-002: design for construction	2026-10-03	AC

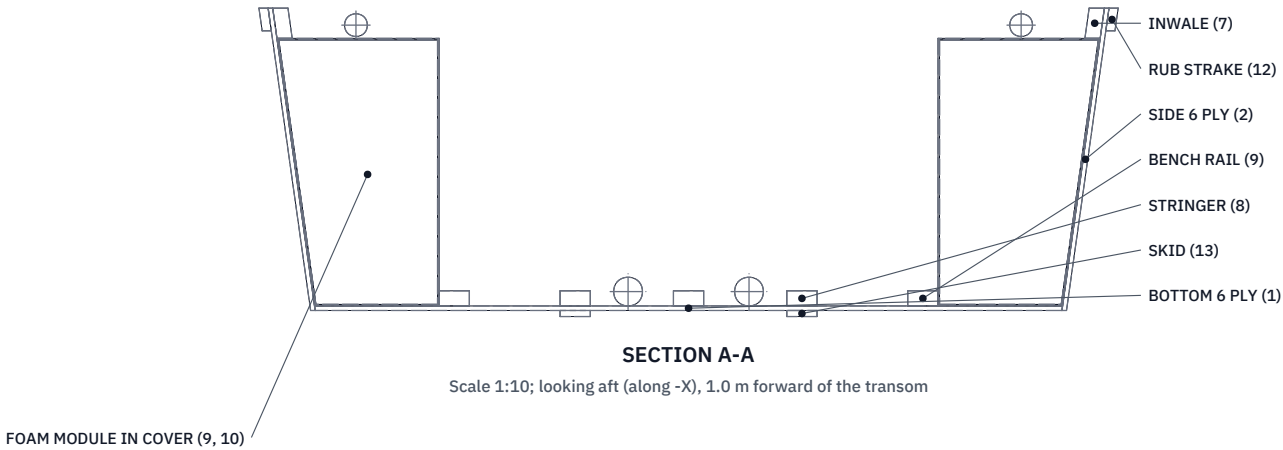

MAIN SIZES AND FIGURES (MM UNLESS STATED)

Length 3,600 in two halves of 1,800; beam over strakes 1,134
Depth 400; bottom 1,000 wide at the chine; sides flared 8 deg
Bottom flat to 2,700 from the transom, raked to 200 at the bow
Each half closed by its own bulkhead; joint: 8 M10 x 80 bolts
Bench modules 330 from the centreline to the side, top 360
Stern step float 450 x 600 x 90, hinged 40 behind the rail
Kick rung 270 below the float; stop straps at 20 deg down
Rated load 6 persons (450 kg); see LSK-CAL-001 for drafts
Third-angle; X from transom, Y to port; (n) = BOM line

LANESKIFF

github.com/BoujeeEnjinia1701/laneskiff

Two-piece flood rescue skiff: general arrangement

DRAWING NO. LSK-DWG-001		REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:25	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
MATERIAL / NOTES Plywood and epoxy path; parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	