
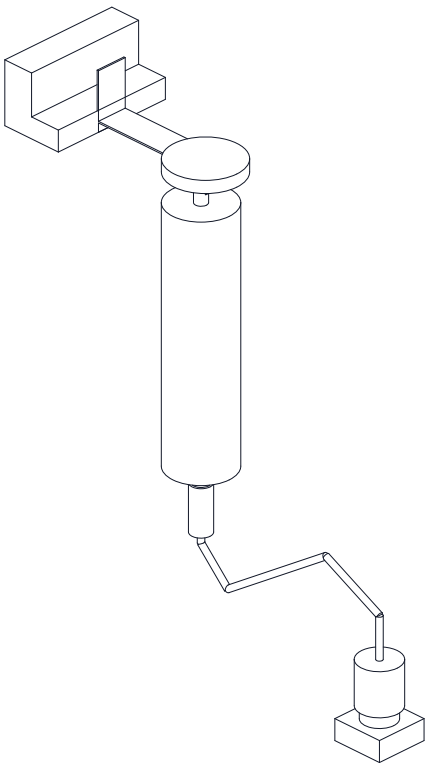


CONCEPT, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC

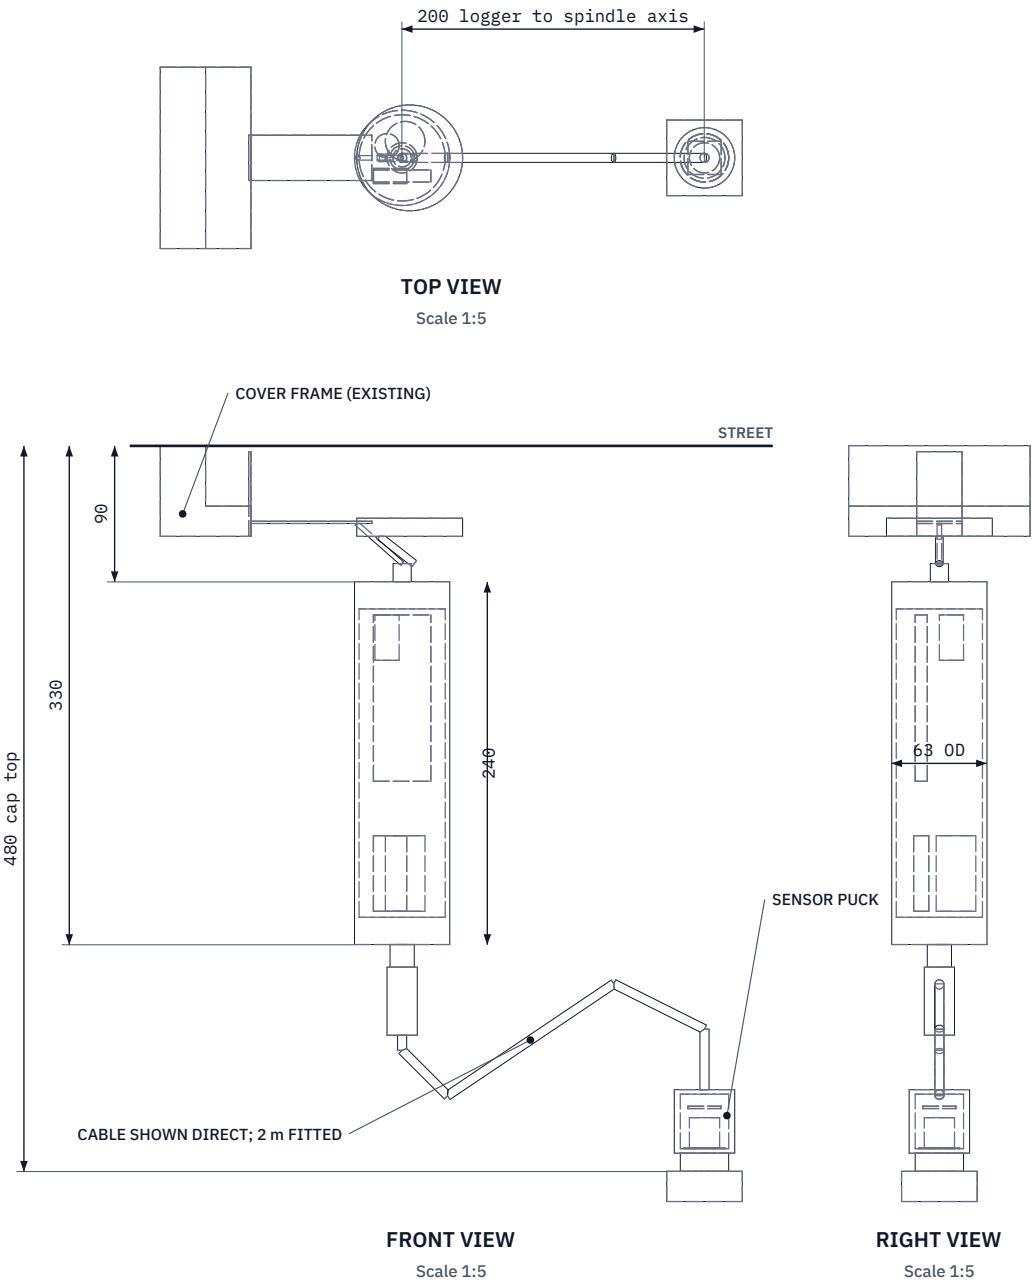

ISOMETRIC VIEW

Not to scale; spindle cap and frame edge grey context

MAIN DIMENSIONS AND INTERFACES (MM)

Logger PVC tube 63 OD x 3 wall x 240; 267 with socket and gland
Sensor puck 40 x 42 aluminium on a 32 mm pot magnet; stack 54
Seismic mass brass 20 x 20 on a 27 mm piezo disc (compression)
Spindle cap 50 square, top 480 below street (example site)
Hanger strap 30 x 1.5 stainless over the frame; lanyard 3
Flat antenna 70 dia, 8 gap below the 40 cover
Sensor cable 2 m, M12 IP68; reaches caps to about 2.1 m deep
No chamber entry; nothing touches drinking water
Third-angle; front view from -Y; street at Z = 0

LEAKLISTEN

General arrangement, logger installed

DRAWING NO. LKL - DWG - 001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES PVC, aluminium, stainless; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	