


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

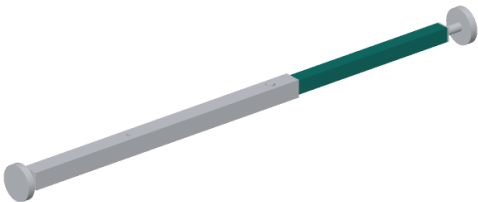


WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 350 mm of 16 x 16 x 1.5 mm square tube; square and deburr.
Seven locking pin holes, 6.5 mm, through the top and bottom walls, 20 mm apart, the first 20 mm from the plain end (20 to 140 mm).
Press a 16 x 16 tube insert with an M10 nut into the far end.
Fit: slide into the outer tube; choose the hole that sets the bar about 20 mm short of the neck width, fit the pin and R-clip, then wind the feet out to take up the last 20 mm.
With the 7 holes and about 30 mm of foot travel the bar spans necks of about 570 to 710 mm (600 mm as drawn, hole 6 of 7).
Check: the pin drops through both tubes at every hole.

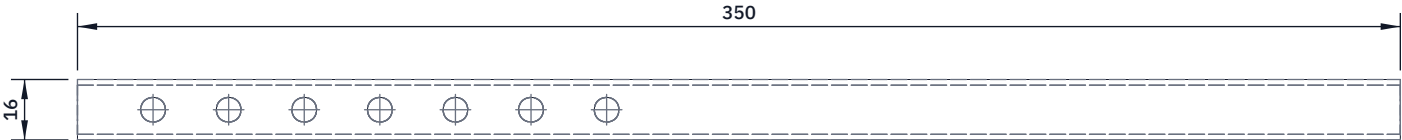

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

LEAKLISTEN

github.com/BoujeeEnjinia1701/leaklisten

LeakListen neck bar inner tube: making sketch

DRAWING NO. LKL - DWG - 108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium square tube 16 x 16 x 1.5 mm, 6063					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand