REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Light pipe hole added (decision of 2026-10-02)	2026-10-02	AC

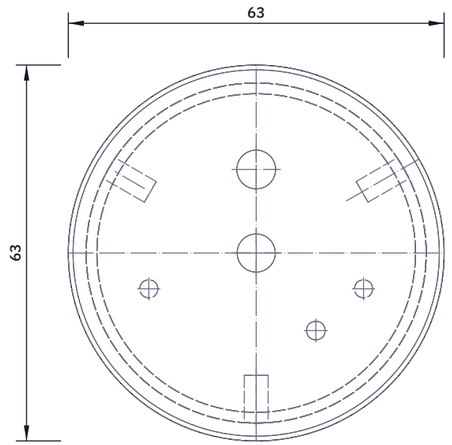

TOP VIEW

Scale 1:1; looking down (along -Z)

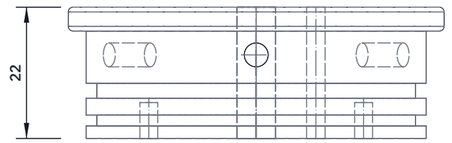

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

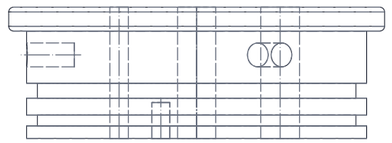

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn from 65 mm acetal bar: flange 63 mm diameter, 4 mm thick;
spigot 57 mm diameter (a light push fit in the tube), 18 mm long.
Two O-ring grooves in the spigot, 2.5 mm wide, 1.8 mm deep, centred
10 and 15 mm below the flange, for 2.5 mm section O-rings.
Eye bolt hole 6.5 mm on the axis, right through.
SMA bulkhead hole 6.5 mm, 14 mm from the axis, right through;
check the size against the bulkhead's datasheet.
Light pipe hole 3.0 mm, right through, 13 mm from the axis on the side
away from the SMA and 10 mm toward the right-hand standoff in the top view.
Inner face: two M3 tapped holes 6 mm deep for the standoffs,
18 mm each side of the axis, 6 mm toward the side away from the SMA.
Radial holes: drill 3.3 mm, tap M4, through the tube's holes,
4 mm below the flange, 120 degrees apart (one away from the SMA).
Check: the plug pushes in by hand with O-rings greased.

LEAKLISTEN github.com/BoujeeEnjinia1701/leaklisten

LeakListen top end plug: making sketch

DRAWING NO.	REV	SHEET	SIZE
LKL-DWG-104	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES: Acetal (POM) round bar, 65 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand