



REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-10-03	AC

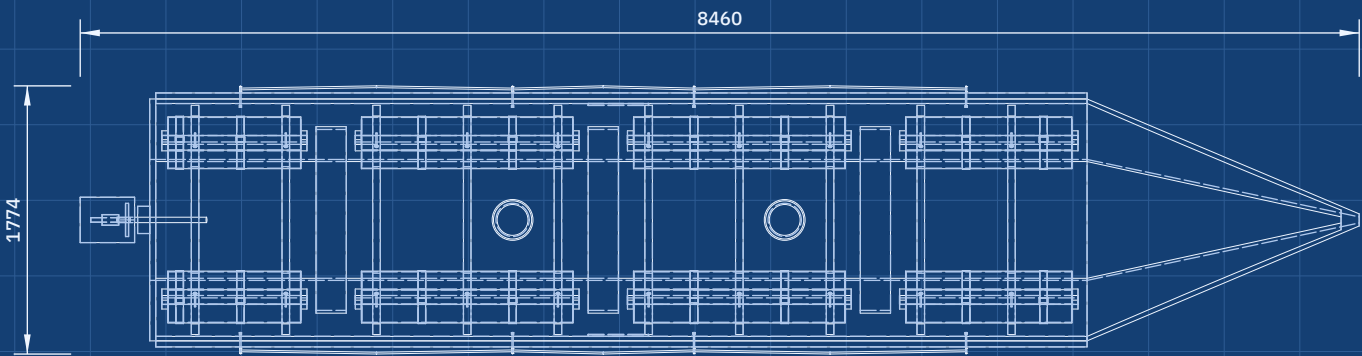


TOP VIEW

Scale 1:50; looking down (along -Z)

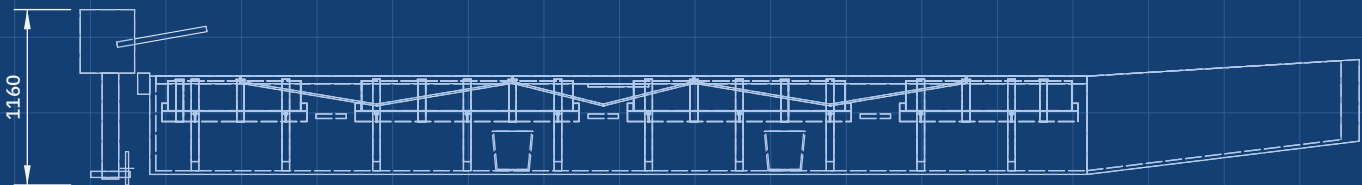


FRONT VIEW

Scale 1:50; looking at the front (along +Y)



RIGHT VIEW

Scale 1:50; looking at the right side (along -X)

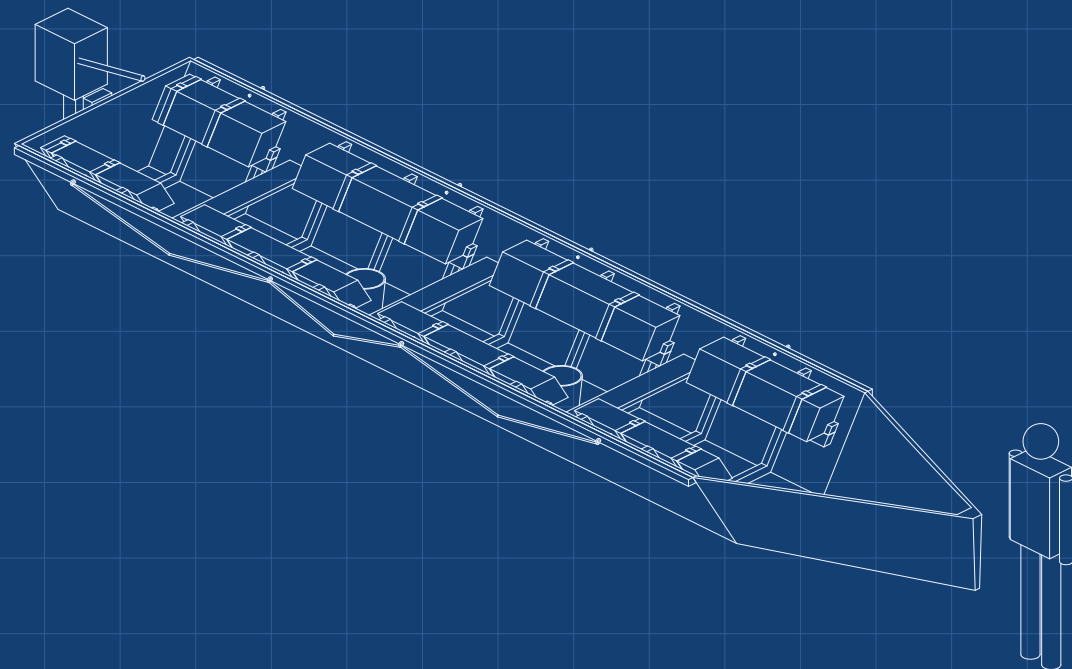

ISOMETRIC VIEW

Not to scale; figure is a 1.75 m person; seen from the front right and above, about 30 deg elevation

KEY FIGURES

Reference canoe 8.0 x 1.6 x 0.65 m, 15 hp outboard; each hull sized with the calculator
8 modules of closed-cell PE foam, 220 x 200 mm, 4.78 m a side; 0.42 m³
Fitted high under the gunwale on shelf battens screwed to the frames
Swamped, design load: 113 mm freeboard amidships, 92 mm lowest
Roll stiffness 761 kg m/rad; same foam on the floor: none with 5 kg more load
Kit 69 kg, USD 682 per canoe; never a substitute for life jackets

LEVELHULL

github.com/BoujeeEnjinia1701/levelhull

Passive flotation retrofit for a wooden fishing canoe concept

DRAWING NO. LVH-DWG-010			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:50	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	