


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

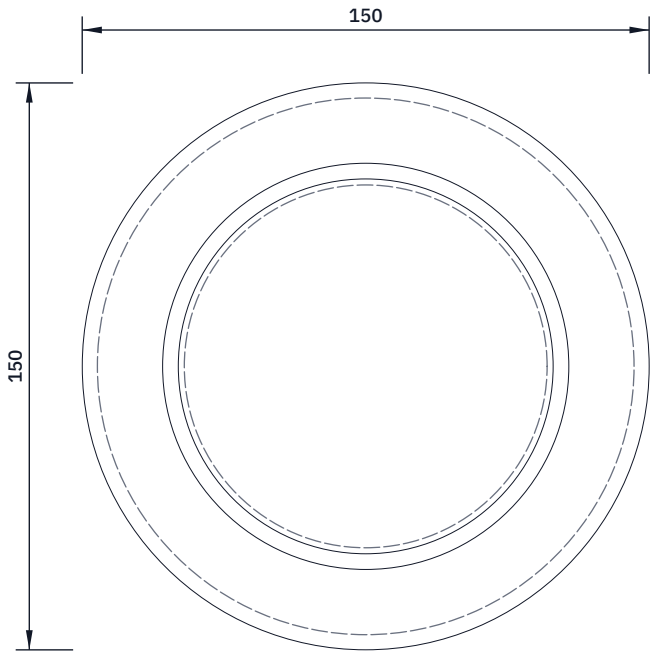


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

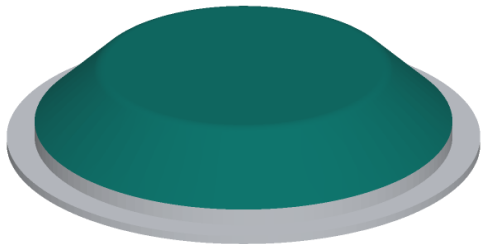

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Outside: 150 mm across at the rim, 104 mm across the crown, 22 mm tall, 6 mm radius round the crown edge.

Inside: a cone 142 mm across at the rim and 96 mm at the top, 18 mm deep, so the crown is 4 mm thick and the rim face is a flat ring 4 mm wide.

Cast in the silicone mould with the core plug (step 2): mix about 95 g of resin with yellow pigment, pour it into the cavity, press the core plug down until its flange sits on the block.

Demould after the maker's time; post-cure as the data sheet says.

Trim the flash at the rim with a knife; keep the rim face flat.

Fit: the rim sits flat on the base tray, over its locating ring.

Check: 22 mm tall outside and 18 mm deep inside (so the crown is 4 mm), no bubbles in the crown, rim flat on a glass plate.

LOADZONE

github.com/BoujeeEnjinia1701/loadzone

LoadZone puck dome (make 2): casting sketch

DRAWING NO. LDZ-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Rigid cast polyurethane, Shore D about 80, yellow, UV stabilised					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand