


CONCEPT, NOT FOR FABRICATION


LumaFlow · github.com/BoujeeEnjinia1701/lumaflow

REV	DESCRIPTION	DATE	BY
P3	Concept sheet	2026-09-26	AC

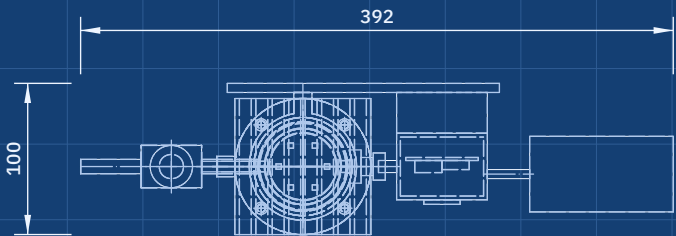


TOP VIEW

Scale 1:5; looking down (along -Z)

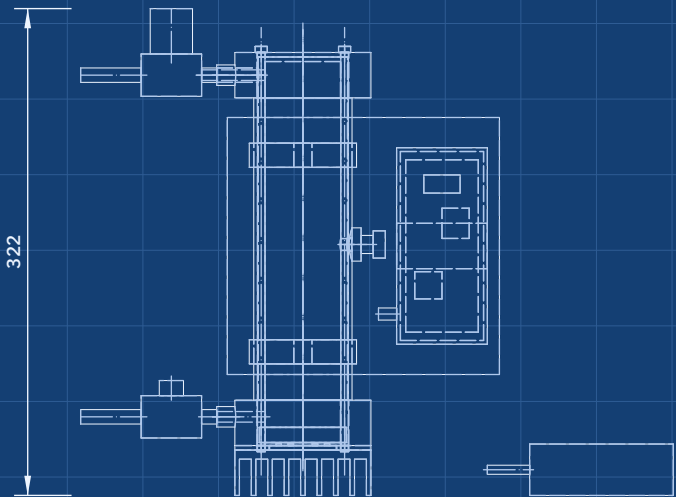


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

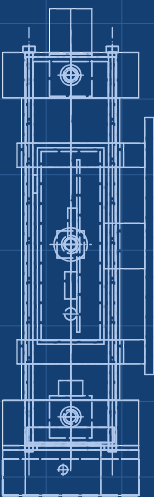

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

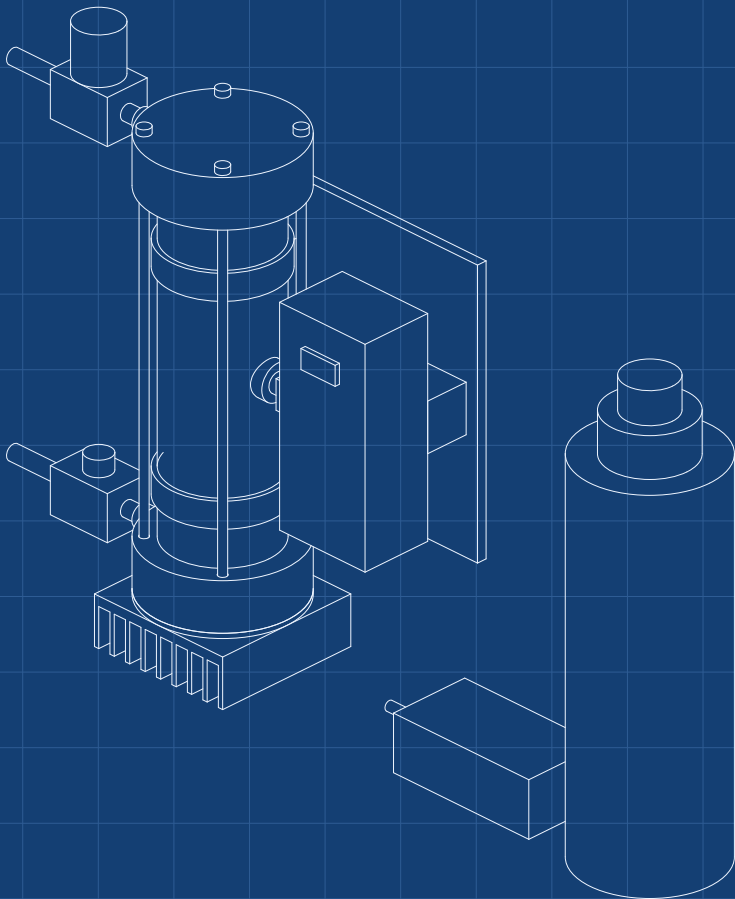

ISOMETRIC VIEW

Not to scale; grey is for scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

1.2 L/min (0.32 gpm), 50 mm bore x 242 mm channel
6 x 275 nm LEDs, 0.36 W UV-C; 54 % absorbed by water
RED 52 to 76 mJ/cm² at 90 % UVT: R2 (40) met
22.6 W while flowing, 0.21 W standby (estimates)
\$338 in parts against the \$340 budget

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

Inline UV-C LED reactor concept

DRAWING NO.

LMF-DWG-010

REV

P3

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:5

UNITS

mm

PROJECTION



DATE

2026-09-26

DRAWN

Amish Chadha

MATERIAL / NOTES

Massing model for concept communication

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand