
CONCEPT, NOT FOR FABRICATION


LumaFlow · github.com/BoujeeEnjinia1701/lumaflow

REV	DESCRIPTION	DATE	BY
P6	Concept sheet	2026-10-25	AC

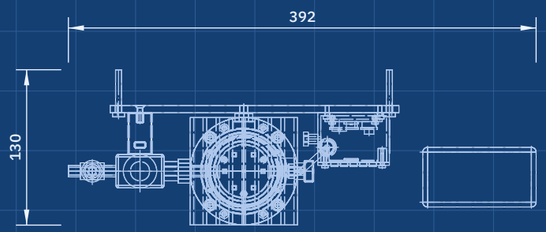


TOP VIEW

Scale 1:5; looking down (along -Z)

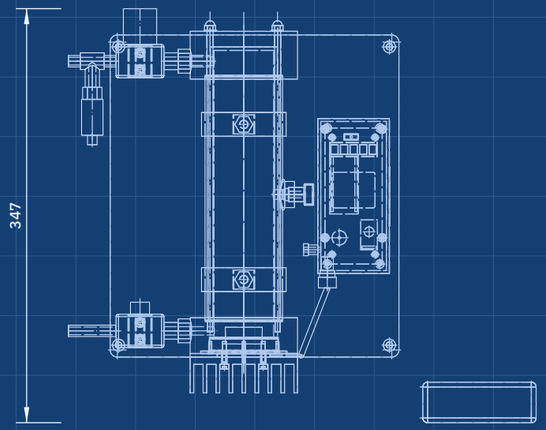


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

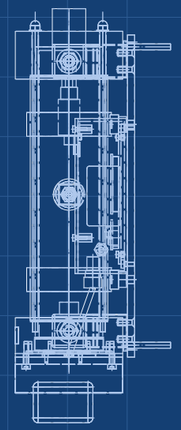

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

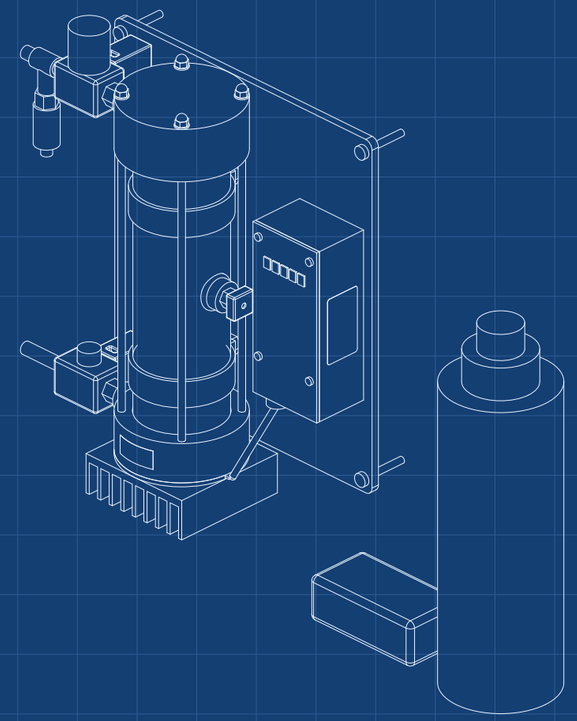

ISOMETRIC VIEW

Not to scale; grey is for scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

- 1.2 L/min (0.32 gpm), 50 mm bore x 242 mm channel
- 6 x 275 nm LEDs, 0.36 W UV-C; 53 % absorbed by water
- RED 51 to 75 mJ/cm² at 90 % UVT: R2 (40) met
- 22.6 W while flowing, 0.21 W standby (estimates)
- $433 estimated; value-engineering target $340

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

Inline UV-C LED reactor concept

DRAWING NO.	REV	SHEET	SIZE
LMF-DWG-010	P6	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

Massing model for concept communication

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand