
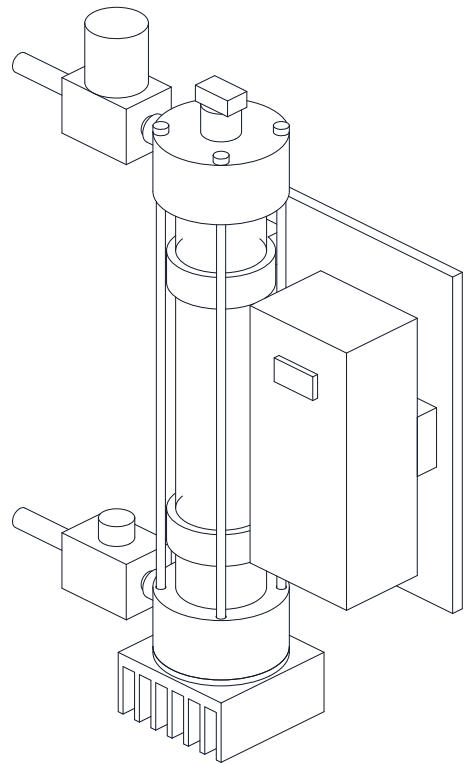


CONCEPT, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC

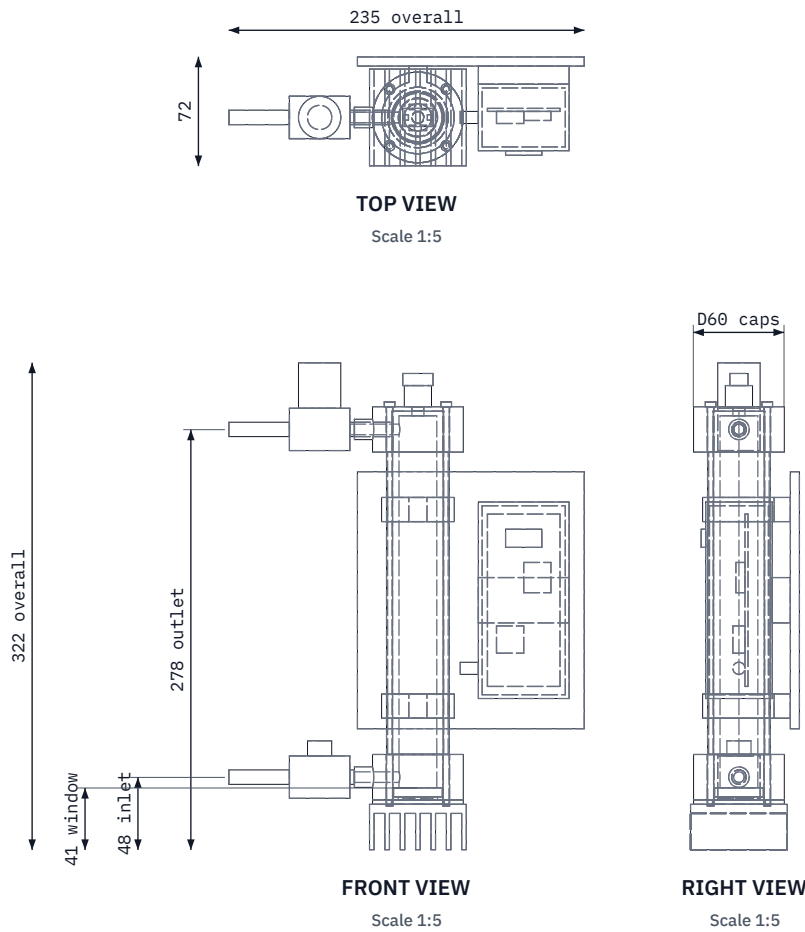

ISOMETRIC VIEW
Not to scale; adapter not shown

MAIN DIMENSIONS AND INTERFACES (MM)

Unit 235 W x 72 D x 322 H, adapter excluded
Channel D25 x 246; ports at Z 48 and 278
Tube D40 x 3 wall x 200, 316; PTFE liner D34
Window D32 x 6 fused silica on a D26 seat
6 x 275 nm LEDs on a 16 mm circle, 0.8 mm below window
Caps D60 x 30; 4 x M4 316 tie rods on D53
Ports 3/8 in push-fit; outlet through a 316 insert
Heat sink 64 x 64 x 30, fins down
Working pressure 8 bar; flow up; mount vertical
Third-angle; front view from -Y, right view from +X

LUMAFLOW

General arrangement

DRAWING NO. LMF-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES 316 tube and lower cap, PTFE liner, fused silica window, acetal upper cap; see bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com					Generated from cad/src; do not edit by hand