


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 2:1; looking down (along -Z)

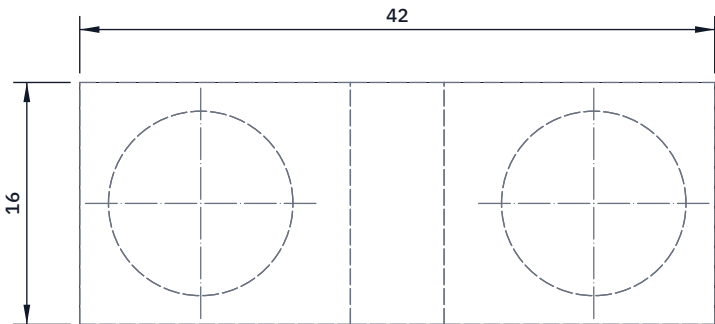


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

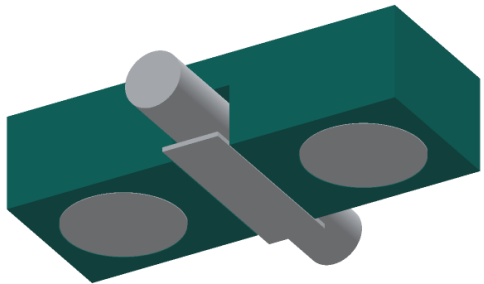

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 42 mm off 16 x 10 mm bar; file the ends square.

Groove across the 16 mm width on the underside, in the middle:
6.2 mm wide, 6.5 mm deep. Saw two cuts, chisel or file out between them, and check depth with the probe sleeve and pad.

Two magnet pockets on the underside, 13 mm each side of centre:
12.2 mm across, 3 mm deep, with a flat-bottomed drill or an end mill in the drill press.

Bond a 12 x 3 mm high-temperature disc magnet in each pocket with high-temperature epoxy, flush with the underside; same pole down.

Fit: the sleeve lies in the groove on its 0.5 mm thermal pad; the magnets pull the clip onto the frame and press the sleeve down on the pad. The lead leaves along the groove.

Check: on a steel plate the clip sits flat and the sleeve cannot slide.

MACHINEPULSE

github.com/BoujeeEnjinia1701/machinepulse

MachinePulse probe clip: making sketch

DRAWING NO. MPL-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium flat bar 16 x 10 mm, 6061 or 6082					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	