




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

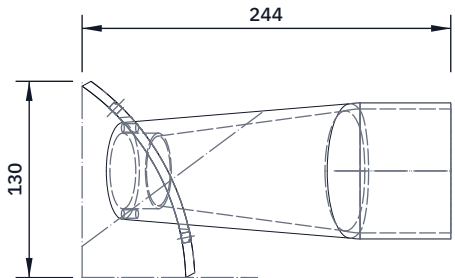


TOP VIEW
Scale 1:5; looking down (along -Z)

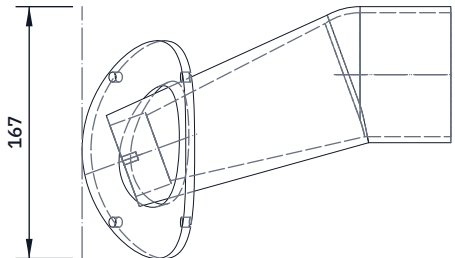

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

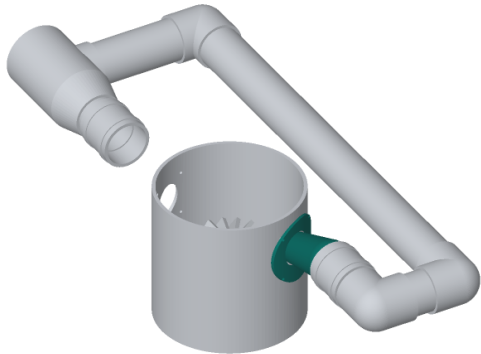

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print two from the model file (cad/step/picoflow-nozzle.step). They are the same part: jet 2's nozzle is jet 1's turned half a turn.

Print standing on the spigot end, with supports under the saddle;

the part fits a 167 x 130 x 244 mm space, about 300 g and 12 h each.

Spigot: 90 mm outside, 60 mm long, horizontal. A gentle 20 deg bend turns the nozzle down to the runner. Cone 170 mm long, from 90 mm to 64 mm outside. Saddle: a patch 144 mm across shaped to the housing, 6 mm thick, four 6.6 mm bolt holes.

Tip: a 50 mm seat 25 mm deep for the insert, and two 5.6 mm holes for M4 heat-set inserts, 28.5 mm each side of the centre.

Fit: the tip goes through the housing hole; the saddle sits on a 2 mm EPDM gasket, four M6 bolts, nuts inside. The spigot joins the pipe in a 90 mm flexible coupling.

Check: spigot 90 mm (fits the coupling); saddle sits on the pipe.

PICOFLOW

github.com/BoujeeEnjinia1701/picoflow

PicoFlow nozzle (make 2, both the same): making sketch

DRAWING NO. PCF-DWG-103		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 4 mm walls, 40 % infill				