



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

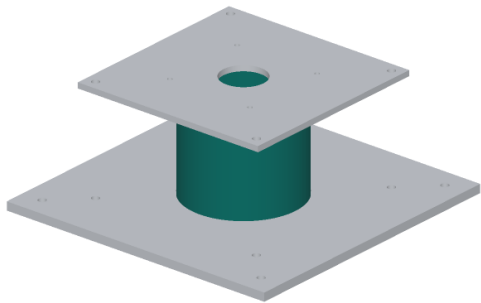

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 146 mm of 160 mm pipe; saw square, file both ends flat and deburr inside.

Drill two 6 mm holes at the bottom edge, on opposite sides, so any water that gets in drains out.

Fit: the bottom end stands in the 2 mm groove on top of the lid; the top end stops 1 mm under the generator plate, which holds it in place.

It covers both bearing units and the jaw coupling; nothing that turns can be reached while the plate is on.

Check: it stands in the groove and the plate clears it.

PICOFLOW

github.com/BoujeeEnjinia1701/picoflow

PicoFlow bearing and coupling guard: making sketch

DRAWING NO. PCF-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES 160 mm PVC pipe, 4 mm wall					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand