


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

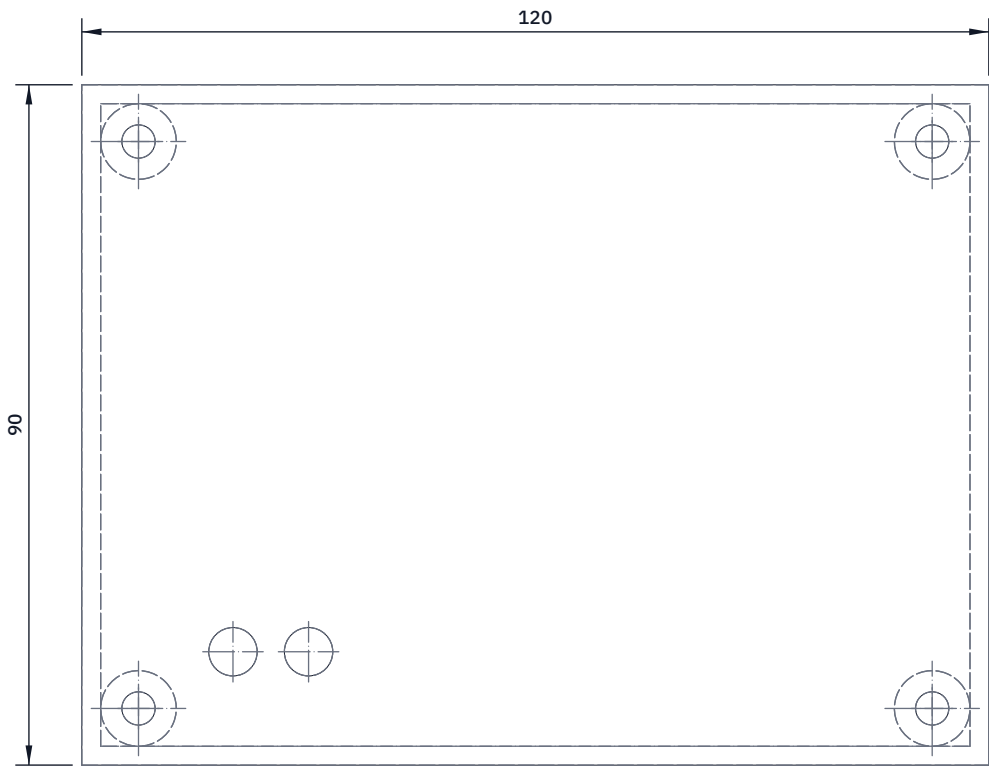


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

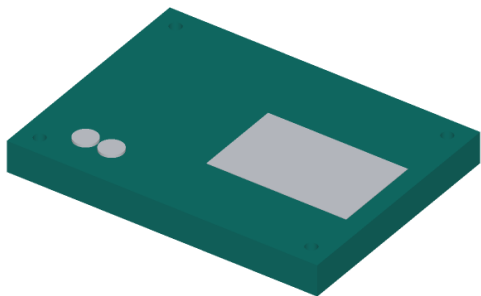

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Lid of the bought box, opaque, with its gasket and corner pillars.

Two 6.4 mm holes for the sealed light pipes, measured from the lid's centre: 40 and 30 mm toward the rear (gland) end, both 30 mm to the right of the long centre line.

Rear hole: power light; front hole: logging light.

Tape the top, pilot 3 mm with wood behind, open out with a step drill; check the size against the light pipe's datasheet.

Keep 25 mm round the GNSS module's patch free of labels and metal.

Nameplate label 54 x 34 mm, centred 26 mm forward, arrow pointing forward, on the cleaned lid top.

Fit: each pipe's O-ring under its flange outside, nut inside.

Check: no crack from either hole; the nuts clear the pillars.

POTHOLELOG

github.com/BoujeeEnjinia1701/potholelog

PotholeLog enclosure lid: drilling sketch

DRAWING NO. PHL - DWG - 104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Lid of the bought IP65 box (opaque)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	