


CONCEPT, NOT FOR FABRICATION

PotholeLog · github.com/BoujeeEnjinia1701/potholelog


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	Supply note: 60 V converter (PHL-DDR-002)	2026-09-25	AC
P3	Constructable design: standoffs, carrier, IMU screws (PHL-DDR-003)	2026-10-01	AC

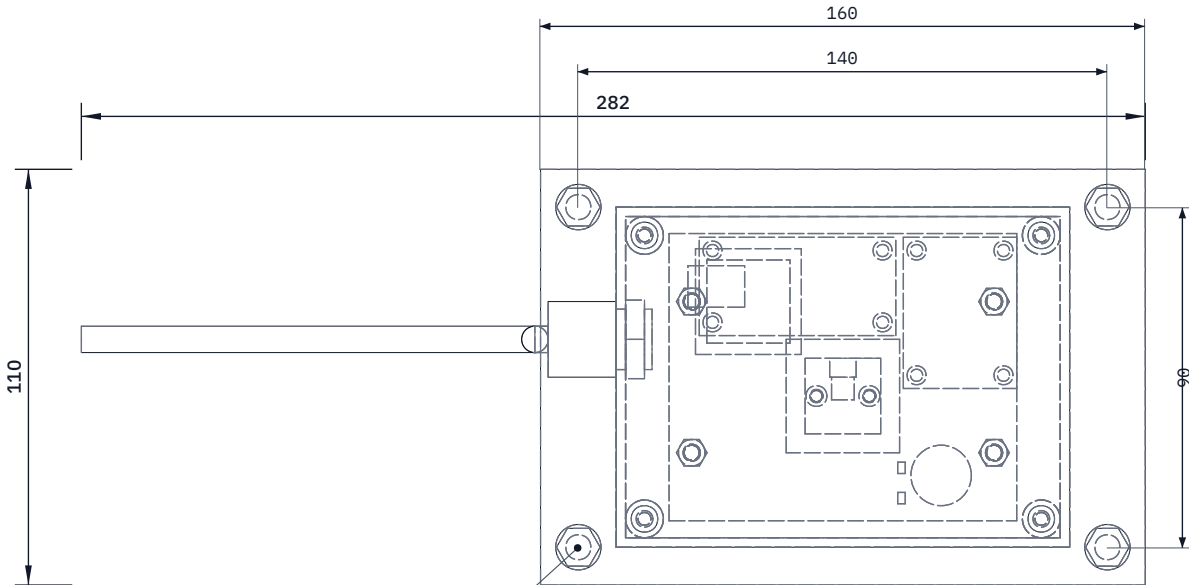

4 x 6.6 THRU FOR M6, LOCKING NUTS

TOP VIEW

Scale 1:2; looking down (along -Z)

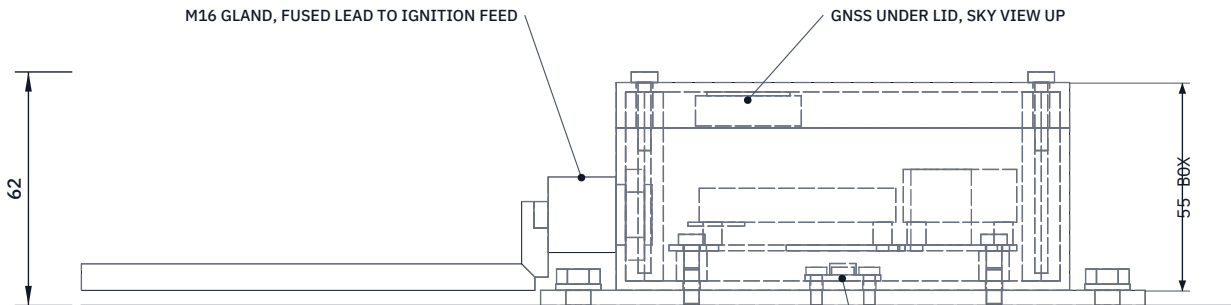

M16 GLAND, FUSED LEAD TO IGNITION FEED

GNSS UNDER LID, SKY VIEW UP


VEHICLE FLOOR OR RAIL

FRONT VIEW

Scale 1:2; looking at the front (along +Y)


IMU ON BOX FLOOR, CENTER 7.3 ABOVE FLOOR

FORWARD +X

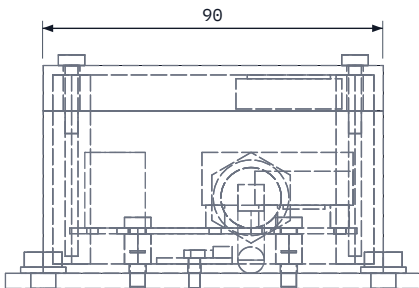

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

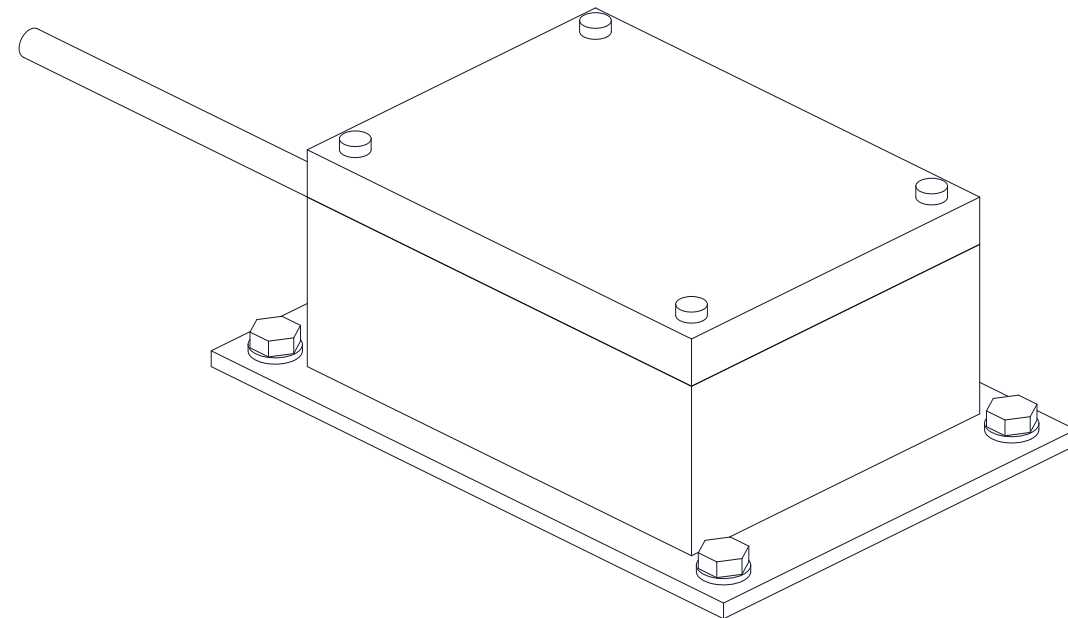

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Plate Al 5052 160 x 110 x 4; 4 x M6 on 140 x 90
Stock IP65 box 120 x 90 x 55; 4 x M4 hex standoffs into plate on 80 x 40
Modules on a 92 x 76 x 1.5 Al carrier on the standoffs
Overall height 59 on the floor; logger about 0.43 kg
Bolt at existing floor, seat-rail or crossmember fixings
Plate first mode about 168 Hz on corner bolts (PHL-CAL-001)
IMU on box floor, 2 x M3 into plate; X axis forward
GNSS under the plastic lid; keep metal off the lid
Supply 9 to 36 V, converter rated 60 V; fused 2 A, ignition switched; 0.54 W
Third-angle; front view from -Y; X forward along the vehicle

POTHOLELOG

github.com/BoujeeEnjinia1701/potholelog

General arrangement

DRAWING NO.

PHL - DWG - 001

REV

P3

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:2

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

Al 5052 plate; stock IP65 box; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand