



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW
Scale 1:10; looking down (along -Z)

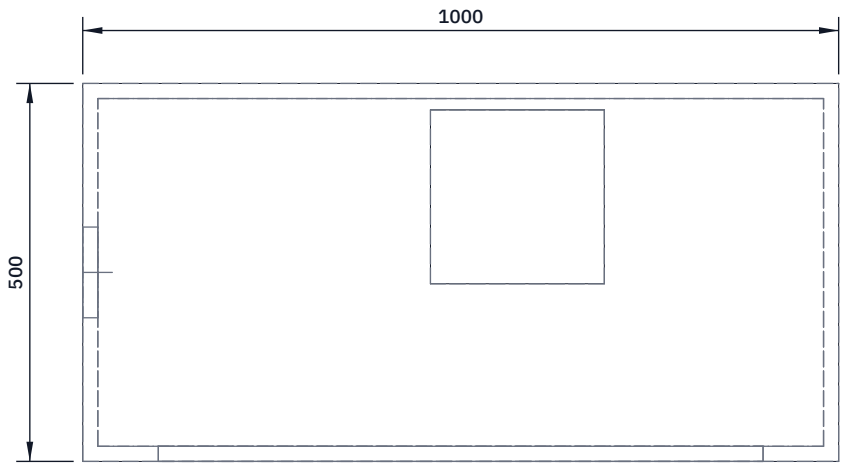

FRONT VIEW
Scale 1:10; looking at the front (along +Y)

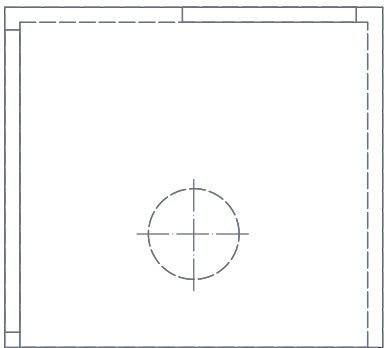

RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

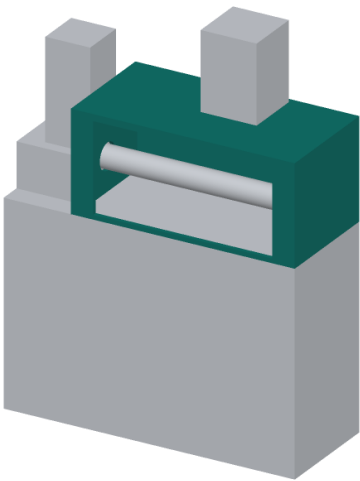

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Open-bottomed box 1000 long, 500 deep, 450 high, 20 mm walls:

1.5 mm galvanised sheet riveted to a 20 x 20 x 3 angle frame.

Front (aisle) face: opening 800 x 400, 100 in from each end,

20 above the bottom edge. Fold the opening edges back 15 mm.

Hopper end: 120 mm hole for the barrel, centre 250 from the front

face and 150 above the bottom edge (10 mm clear of the barrel).

Top: cut-out for a 250 mm duct spigot, centre 575 from the hopper

end and 350 from the front face; rivet the spigot on.

Bottom flange: 20 x 20 angle, six 9 mm holes for M8 bolts.

Fit: stands on the extruder frame top (900 mm up), bolted down;

the hopper stays outside, against the hopper end.

Check: the barrel turns clear of the hole all round.

ReflowEconomy hood B (extruder barrel enclosure): making sketch

DRAWING NO. RFE-DWG-103	REV P1	SHEET 1 of 1	SIZE ANSI B
-----------------------------------	------------------	------------------------	-----------------------

SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
----------------------	--------------------	----------------	---------------------------	------------------------------

MATERIAL / NOTES Galvanised steel sheet 1.5 mm on 20 x 20 x 3 angle frame
