


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:20; looking down (along -Z)

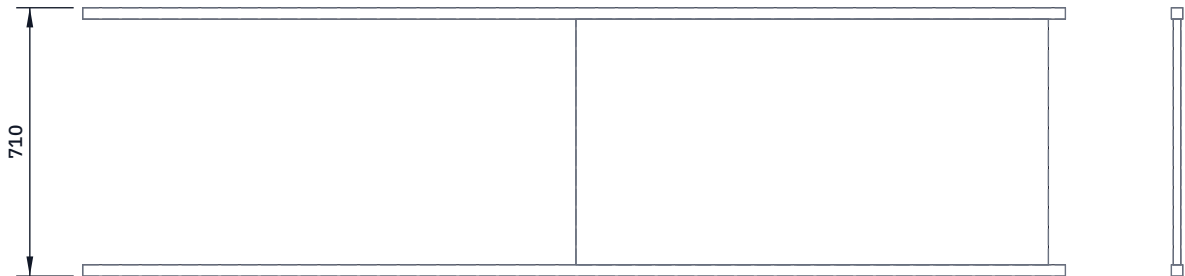

FRONT VIEW

Scale 1:20; looking at the front (along +Y)

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Rails: two 2600 mm lengths of 30 x 30 x 2 aluminium channel, open sides facing each other; screw to the booth front with M6 screws at 400 pitch, the lower rail 845 to 875 mm up, the upper rail 1525 to 1555 mm up, from 0 to 2600 along the booth front (running 150 mm past its right end). End stop each end.

Sash: one panel 1250 x 650 of 1.5 mm galvanised sheet with all edges folded 15 mm; two handles; edges run inside the channels.

There is only one sash, so only one opening is open at a time: over opening 2 to press, over opening 1 to cool and unload.

Check: the sash slides end to end with one hand and covers each opening with at least 25 mm to spare on both sides.

REFLOWECONOMY

github.com/BoujeeEnjinia1701/refloweconomy

ReflowEconomy sliding sash and rails: making sketch

DRAWING NO. RFE-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Galvanised sheet 1.5 mm; aluminium channel 30 x 30 x 2					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	