



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

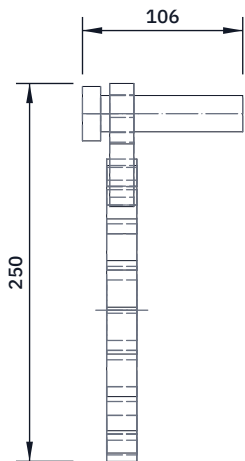


TOP VIEW

Scale 1:5; looking down (along -Z)

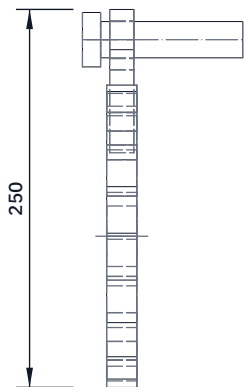


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

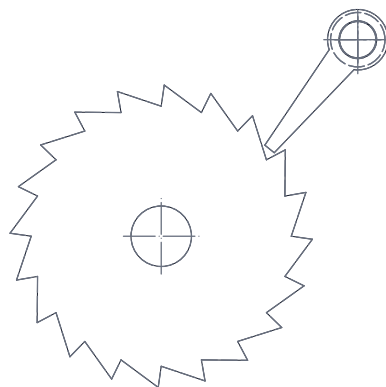

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

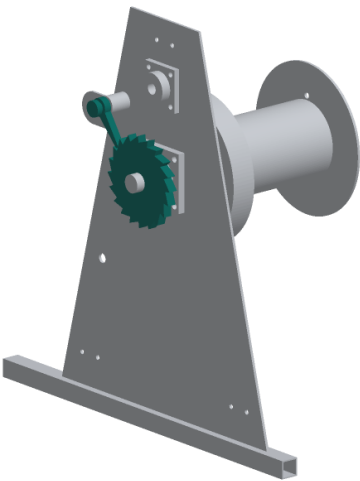

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Wheel: 200 OD, 20 teeth, 20 mm C45 plate. Each tooth rises

14 mm along the circle and drops straight back to the root.

Bore 40 with a 12 mm keyway; set screw M10 in the hub side.

Pawl: 16 mm C45 plate, 25 wide at the pivot (40 OD round end),

8 wide at the tip; 25 mm pivot hole; harden the tip.

Pivot: M24 bolt through the pawl, the 40 mm boss and the cheek,

nyloc nut inside. Pivot 130 behind and 130 above the drum centre.

Spring: stainless return spring from the pawl to a 6 mm hole in

the cheek ear, so the pawl always drops into the teeth.

The pawl lets the drum wind rope in and stops it running back.

Fit: the wheel goes on the drum shaft outside the left bearing,

10 mm clear of it; the pawl lies in the same plane.

Check: wind by hand; the pawl clicks into every tooth and holds.

SALTDRAg

github.com/BoujeeEnjinia1701/saltdrag

SaltDrag ratchet wheel and pawl (make 2 sets): making sketch

DRAWING NO.

SDG-DWG-106

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:5

UNITS

mm

PROJECTION



DATE

2026-10-03

DRAWN

Amish Chadha

MATERIAL / NOTES

C45 plate 20 mm (wheel) and 16 mm (pawl), laser or flame cut