



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

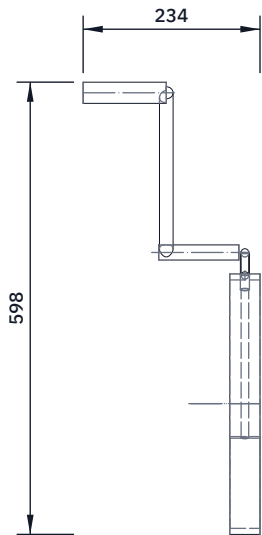


TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)

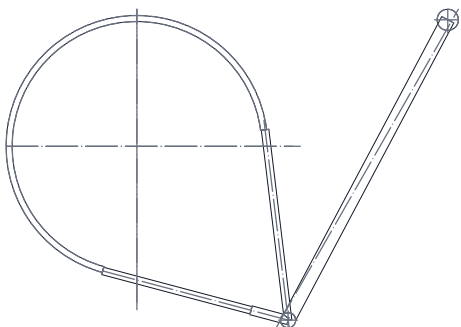

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

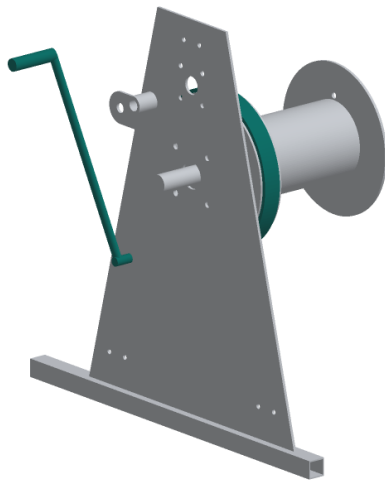

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Band: steel strip 40 x 3 mm, about 760 long, rolled to 340 ID;
woven brake lining 5 mm riveted inside with countersunk rivets.
The band wraps about 245 deg round the brake rim on the left flange,
open toward the rear bottom.
Ends: a 10 mm link from each end. The upper end goes to the pivot
pin; the lower end goes to the inner arm, 50 mm from the pivot.
Pivot: 20 mm shaft through a 21 mm hole in the left cheek, 200
behind and 330 above the ground. Inner arm inside, lever outside.
Lever: 25 mm bar, 450 long, rising at 62 deg toward the rear; grip
at the top. Lifting the lever tightens the band.
A 92 N pull on the grip holds the rated 3 kN rope pull (estimate).
Fit: lining 2 to 3 mm off the rim when the lever is down.
Check: lever up, the drum cannot be turned by hand at the rim.

SALTDRAg

github.com/BoujeeEnjinia1701/saltdrag

SaltDrag brake band and lever (make 2): making sketch

DRAWING NO. SDG-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Steel strip 40 x 3 with 5 mm woven lining; bar 25 and 20 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand