REV	DESCRIPTION	DATE	BY
P1	First making sketch (SDG-DDR-002)	2026-10-03	AC
P2	SDG-DEC-001 D17 to D24: STEM check fixes, kit 1.9.1	2026-10-24	AC

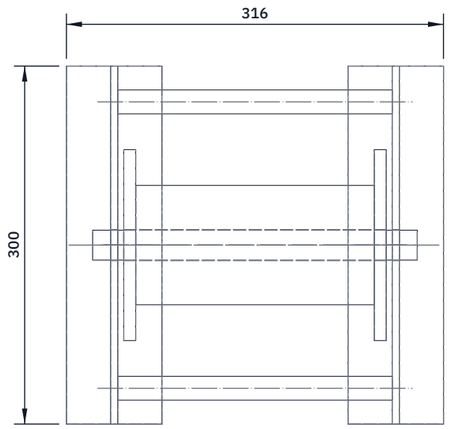

TOP VIEW

Scale 1:5; looking down (along -Z)

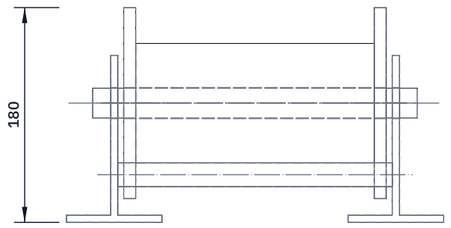

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

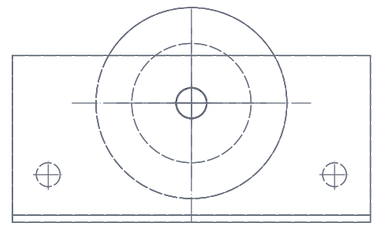

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

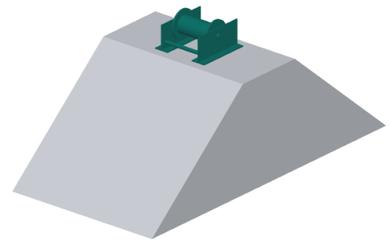

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Side plates: two, 6 mm, 300 long x 140 tall, with a 70 mm round boss at 100 up; 26 mm axle hole at its centre. 236 apart (centres).
Foot plates: 80 x 6 mm, 300 long, welded under each side plate.
Tie bars: two 20 mm round bars between the side plates, 120 ahead of and behind the axle, 40 up. Weld, then galvanise.
Roller: UHMW-PE 100 OD x 200 long, 26 mm bore; two UHMW-PE flanges 160 OD x 10 bolted or pressed on the ends.
Axle: stainless 316, 25 mm, 272 long, 6.6 mm split pin holes 6 from each end, outside the side plates.
The saddle sits astride the bund crest with the rope over the roller, so the rope never cuts the bund. Roller top 150 above the crest.
Fit: 5 mm clear between the flanges and the side plates.
Check: the roller spins freely; the feet sit flat on a board.

SALTDRAG

github.com/BoujeeEnjinia1701/saltdrag

SaltDrag bund roller saddle (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
SDG-DWG-109	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

S275 plate 6 mm, bar 20 mm, galvanised; UHMW-PE roller; 316 axle

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand