



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

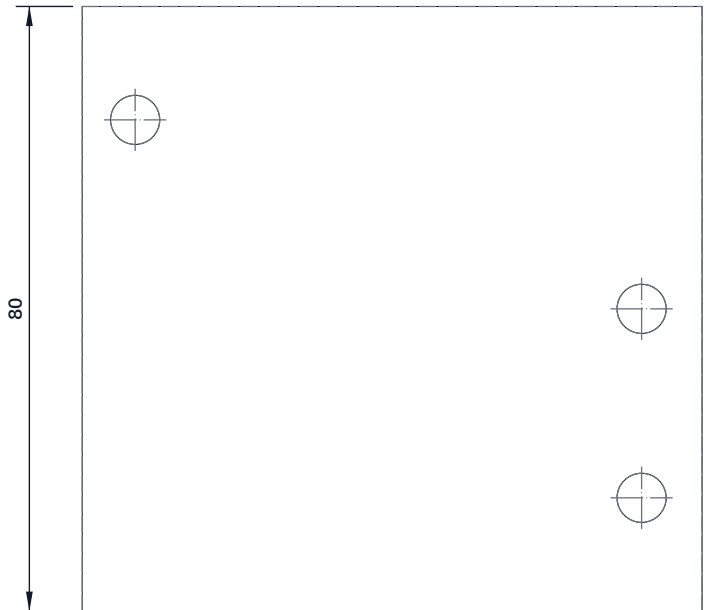


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

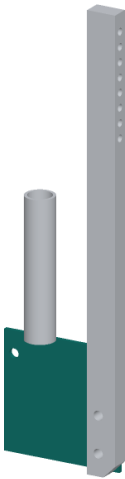

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 82 x 80 mm blanks of 3 mm plate; break the edges.

6.5 mm holes, measured from the front edge and up from the bottom:

8 from the front, 15 and 40 up (shank bolts);

7 from the rear edge, 65 up (rear spacer).

Two 4 mm holes 3 mm below the top edge, 45 and 60 from the front, for the cable tie that holds the drop tube.

Fit: one each side of the shank's lower end, front edges 4 mm behind the shank front; a 12 mm spacer and M6 bolt at the rear keep them 12 mm apart. Seed falls between them into the furrow.

Check: the bottom edges are level with the shank bottom.

SEEDLINE

github.com/BoujeeEnjinia1701/seedline

SeedLine boot side plate (make 2): making sketch

DRAWING NO. SDL - DWG - 118			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 3 mm, S235 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand