

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	SDL-DEC-001: 13 mm slot, plate liners, UV-stabilized door	2026-10-02	AC



TOP VIEW

Scale 1:1; looking down (along -Z)




FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

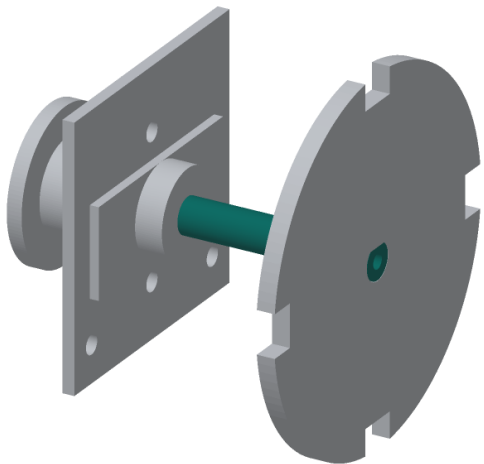

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut a 110 mm length of 12 mm bright bar; chamfer the ends 0.5 mm.

From the chain-side end: file 1 mm flats 0 to 12 mm (sprocket) and at each bearing (16 to 28 mm and 34 to 46 mm).

File a D-flat 1.4 mm deep over the last 25 mm (85 to 110 mm): the collar set screw, the plate's hub and the plate sit on it.

Drill 5.0 mm, 18 deep, in the plate end and tap M6, 15 deep, for the plate knob. Centre it in a vice V-block under a drill stand.

Fit: held from the chain side only, in two bearings on the bearing plate; its plate end stops level with the plate's door-side face.

Check: a seed plate slides on and off the D-flat by hand.

SEEDLINE

github.com/BoujeeEnjinia1701/seedline

SeedLine plate shaft: making sketch

DRAWING NO. SDL-DWG-111			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Bright steel round bar 12 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	