

CONCEPT, NOT FOR FABRICATION

SinkGrab · github.com/BoujeeEnjinia1701/sinkgrab

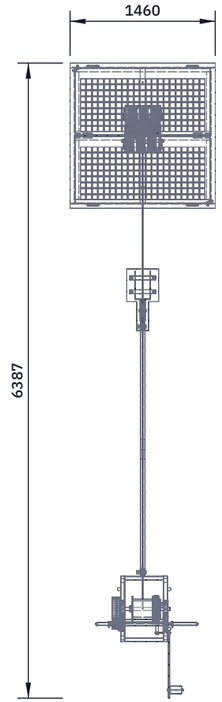


TOP VIEW

Scale 1:60; looking down (along -Z)



FRONT VIEW


Scale 1:60; looking at the front (along +Y)

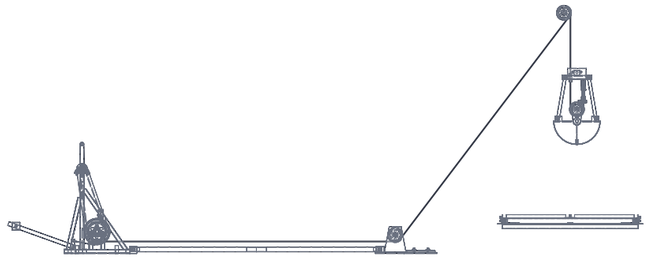

RIGHT VIEW

Scale 1:60; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-10-03	AC
P2	SKG-DDR-002: design for construction	2026-10-03	AC
P3	SKG-DDR-003: 3:1 tackle, long crank handle, toe blades	2026-10-03	AC
P4	Kit 1.9.1: redrawn from the detailed model; SKG-DEC-001 K1 to K21	2026-10-24	AC
P5	SKG-DEC-001 O4: crank slip clutch and dead-end load indicator	2026-10-25	AC

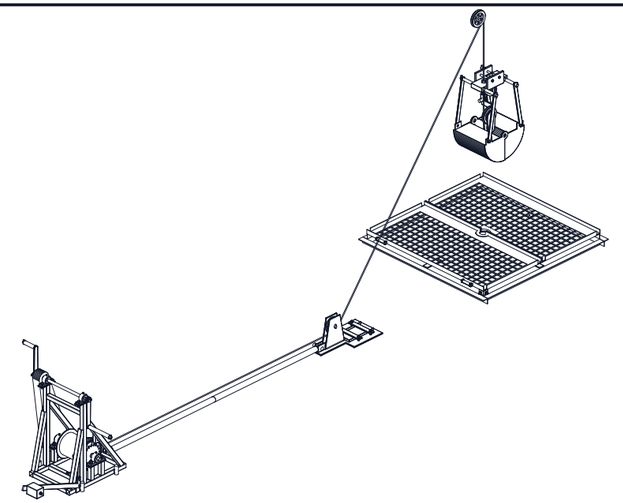

ISOMETRIC VIEW

Not to scale; tripod not shown; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Well axis at x = y = 0; collar top 300 above ground; lining ID 1300
Lead sheave at the HatchSide leg A foot: centre 1760 out, 185 up
Drum axis 3,000 beyond the lead sheave, 220 up; fleet 1.9 deg
Drawbar 48.3 x 3.2, pins 2,470 apart, 40 up
Line 8 mm: drum underwound, horizontal at 120, up leg A at 53 deg
Head sheave 150 OD for 8 mm rope in the HatchSide cheeks; line drops on the well axis
Well-head frame: 50 x 50 x 5 angle, opening 1360 square, on the collar
Doors 1,364 x 680, hinged at y = +/- 695; 64 mm pole hole when closed
Grab shown closed at the dump position, hinge 1,330 up
Capstan: 4:1 chain, slip clutch on the crank shaft, pawl, weighted band brake
Third-angle; front view from -Y

SINKGRAB

github.com/BoujeeEnjinia1701/sinkgrab

Rope grab well-deepening kit: well-head layout

DRAWING NO.	REV	SHEET	SIZE
SKG-DWG-001	P5	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:60	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

Layout only; parts per SKG-DWG-002 and SKG-DWG-101 to 117. HatchSide tripod not shown. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand