



CONCEPT, NOT FOR FABRICATION

SinkGrab · github.com/BoujeeEnjinia1701/sinkgrab

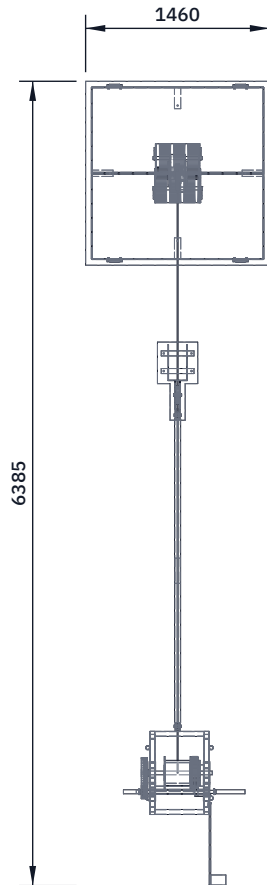


TOP VIEW

Scale 1:60; looking down (along -Z)



FRONT VIEW


Scale 1:60; looking at the front (along +Y)

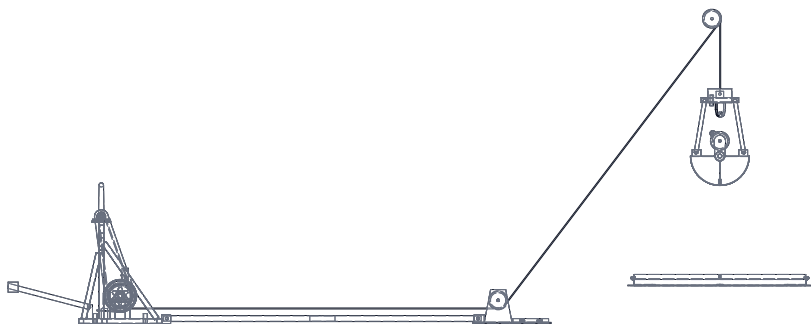

RIGHT VIEW

Scale 1:60; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-10-03	AC
P2	SKG-DDR-002: design for construction	2026-10-03	AC
P3	SKG-DDR-003: 3:1 tackle, two-hand crank handle, toes 40 mm past the ring	2026-10-03	AC

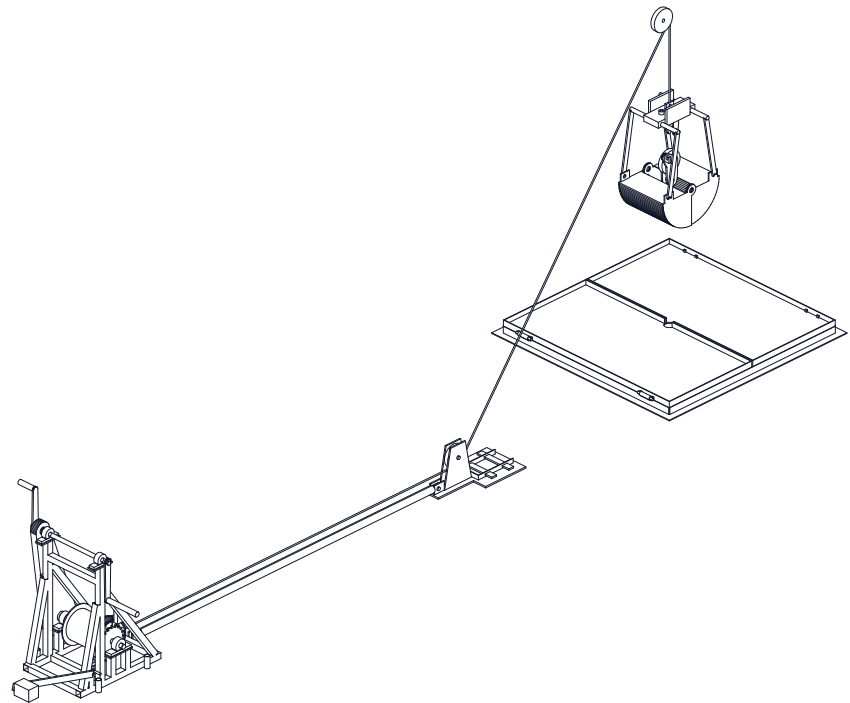

ISOMETRIC VIEW

Not to scale; tripod not shown; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Well axis at $x = y = 0$; collar top 300 above ground; lining ID 1300

Lead sheave at the HatchSide leg A foot: centre 1760 out, 185 up

Drum axis 3,000 beyond the lead sheave, 220 up; fleet 1.9 deg

Drawbar 48.3 x 3.2, pins 2,470 apart, 40 up

Line 8 mm: drum underwound, horizontal at 120, up leg A at 53 deg

Head sheave 150 OD for 8 mm rope in the HatchSide cheeks; line drops on the well axis

Well-head frame: 50 x 50 x 5 angle, opening 1360 square, on the collar

Doors 1,364 x 680, hinged at $y = \pm 695$; 64 mm pole hole when closed

Grab shown closed at the dump position, hinge 1,330 up

Capstan: 4:1 chain, 3 mm shear pin, pawl, weighted band brake

Third-angle; front view from -Y

SINKGRAB

github.com/BoujeeEnjinia1701/sinkgrab

Rope grab well-deepening kit: well-head layout

DRAWING NO.

SKG-DWG-001

REV

P3

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:60

UNITS

mm

PROJECTION



DATE

2026-10-03

DRAWN

Amish Chadha

MATERIAL / NOTES

Layout only; parts per SKG-DWG-002 and SKG-DWG-101 to 117. HatchSide tripod not shown. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand