


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:5; looking down (along -Z)

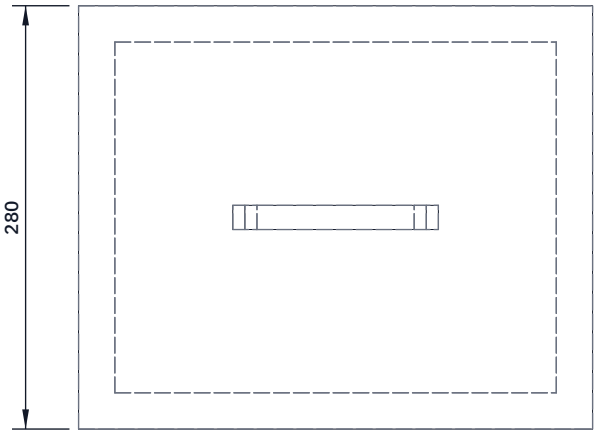


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

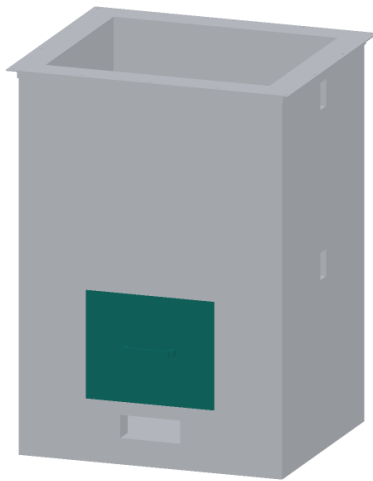

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Door plate 340 wide x 280 tall, 3 mm: it laps the 300 x 240 opening by 20 all round.

Plug: 49 mm fibre board 292 x 232, screwed to the inside of the plate with stainless screws and washers, centred, so it sits 4 inside the opening all round when the door is shut.

Handle: 16 mm round bar 120 long on two 20 mm standoffs, centred.

Hinges: two weld-on lift-off hinges on the right edge, 40 in from top and bottom; weld the shell leaves with the door held shut.

Latch: a turn latch on the left edge with a keeper welded to the shell.

Fit: the door closes onto 12 mm ceramic rope glued round the opening.

Check: the door shuts on the rope all round; the plug clears the lining by about 4 mm.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot firebox door: making sketch

DRAWING NO. STR-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel sheet 3 mm; 46 mm fibre board; 16 mm bar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	