BUILD PLAN SKETCH, PLAN NOT YET BUILT

SteamRoot · github.com/BoujeeEnjinia1701/steamroot

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	No economizer studs on the roof; the bank box frame is bolted down with the...	2026-10-02	AC
P3	Flue hole moved 145 to the front for the gas-pass baffles (STR-DEC-001 S1)	2026-10-24	AC

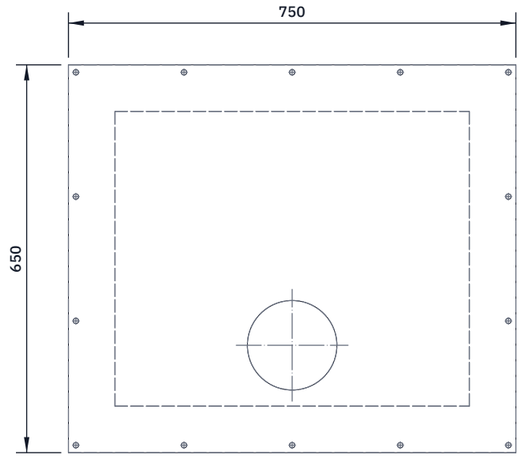

TOP VIEW

Scale 1:10; looking down (along -Z)

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

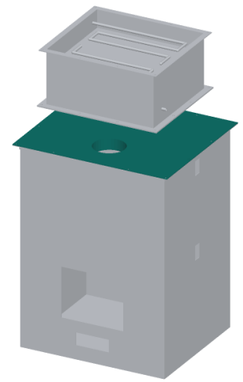

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Roof plate: 3 mm sheet 750 x 650, the outside of the top frame.
Cut a 150 flue hole, centred on the length, 145 in front of centre.
Drill 14 holes 9 mm, 12.5 in from the edge, to match the frame:
five along each side, two more at each end.
The evaporator bank box (sketch 122) stands on the roof: its
bottom frame takes the same 14 bolts, M8 x 35.
Roof board: 50 mm fibre board 594 x 494, its 150 hole under the
plate's; pinned under the plate with stainless pins and washers.
Fit: on a 12 mm ceramic rope gasket on the frame; bank box frame
on a second gasket on top; 14 M8 bolts through all three, nuts
under the frame. The board fits inside the wall lining.
Check: the roof seats on the rope all round; no light shows.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot firebox roof and roof board: making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-110	P3	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Mild steel sheet 3 mm; 50 mm fibre board

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand