BUILD PLAN SKETCH, PLAN NOT YET BUILT

SteamRoot · github.com/BoujeeEnjinia1701/steamroot

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

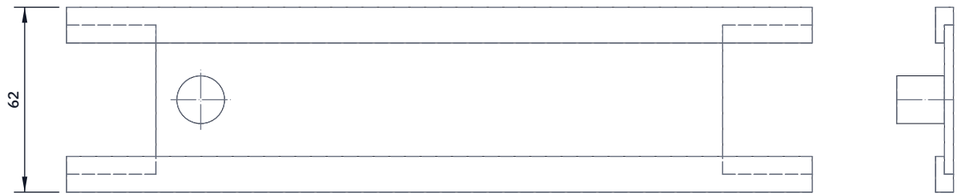

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

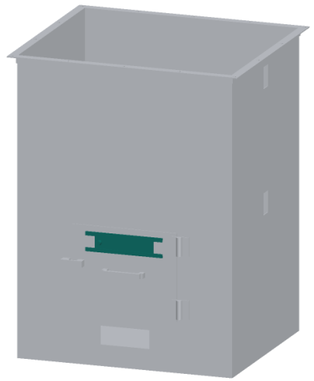

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Slide: 3 mm plate 190 wide x 50 tall with a 16 mm knob at the left.
Guides: two strips 250 long built from 3 mm bar and a 3 mm lip,
welded to the outside of the door plate above and below the
secondary air slot, so the slide moves sideways between them.
The slot is 150 x 20; the slide covers it with 15 to spare.
Loose fit, about 1 mm: it must move by hand when hot (gloves).
Secondary air enters above the fire bed and burns the gases off
the wood; the primary slide sets the burning rate.
Check: the slide shuts the slot; the door still closes and latches.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot secondary air damper slide and guides: making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-124	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Mild steel sheet 3 mm; flat bar 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand