BUILD PLAN SKETCH, PLAN NOT YET BUILT

SteamRoot · github.com/BoujeeEnjinia1701/steamroot

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the evaporator bank and dampers	2026-10-02	AC
P2	Two M6 bolts a foot plate (four do not clear the hood roof)	2026-10-24	AC

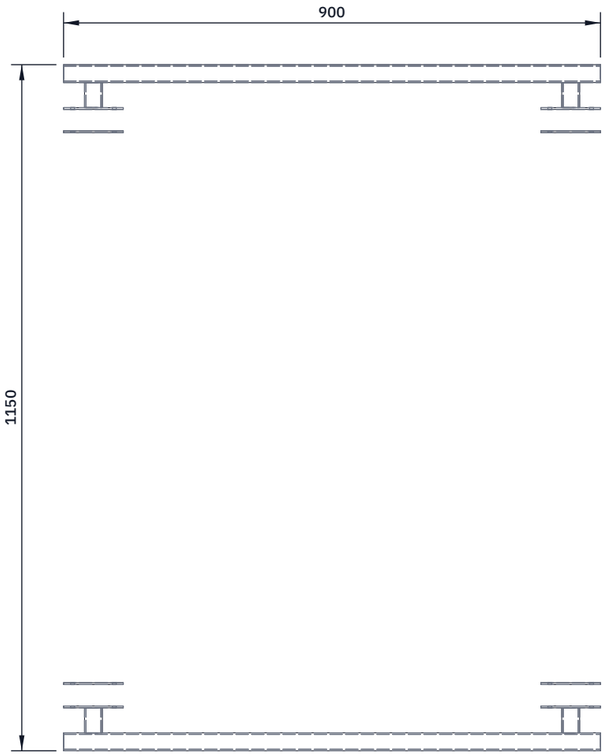

TOP VIEW

Scale 1:10; looking down (along -Z)

FRONT VIEW

Scale 1:10; looking at the front (along +Y)

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

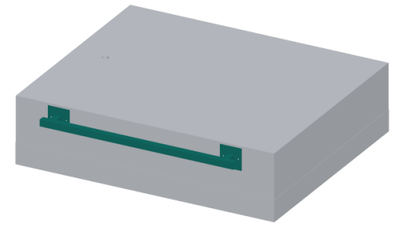

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two sets (one a hood). Each side: a 900 long bar of 30 x 30 x 2.5 tube, ends capped, on two standoffs 800 apart.

Standoffs: 30 x 30 tube 57 long, welded to the bar and to a 100 x 100 x 3 foot plate with two 7 mm holes, 70 apart, level.

Fit: foot plates on the hood sides, centred 60 down from the top, through-bolted (2 x M6 each) to 100 x 68 backing plates inside.

Sized to carry ballast weights: up to 40 kg a hood, hung two a side, at a load factor of 2 (bending about 34 MPa in the bar).

Take the weights off before the hood is lifted and moved.

Check: a 20 kg weight hung mid-bar: no visible bend or play.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot hood handles for ballast (make 2 sets): making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-126	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Steel square tube 30 x 30 x 2.5 mm; plate 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand