
BUILD PLAN SKETCH, PLAN NOT YET BUILT

SteamRoot · github.com/BoujeeEnjinia1701/steamroot

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the gas-pass baffles (STR-DEC-001 S1)	2026-10-24	AC

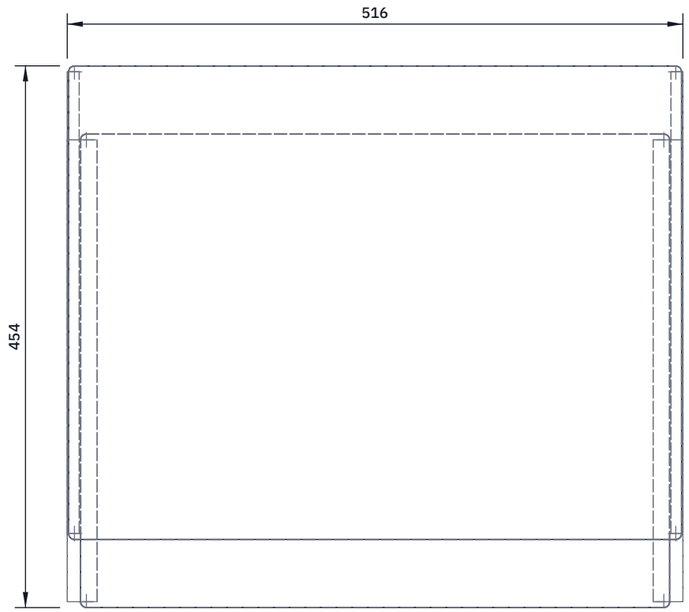

TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

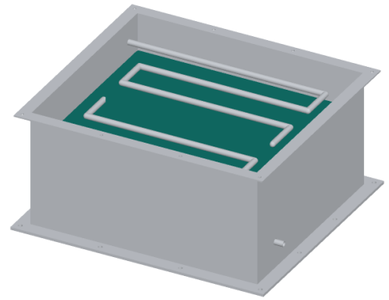

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Two baffles of 1 mm 316L stainless sheet, corners R5: lower 494 x 397, underside 97.5 above the floor, from the front wall to 58 short of the back; upper 514 x 397, underside 173.5 up, from 58 behind the front wall to the back wall.

Ledges on the two end walls, about 387 long, one fillet weld each: lower pair 25 x 3 flat (they close the lower baffle's end gaps), upper pair 10 x 3 flat so the lower baffle passes between them.

Gas: in at the front of the floor, across the bottom layer, back over the middle layer, across the top layer to the outlet.

Fit: on the bench slide the lower baffle in from the front and the upper from the back between the bank's layers; lower all three into the box together. 316L: the cold end runs wet with acid.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot economizer gas-pass baffles and ledges: making sketch

DRAWING NO.	REV	SHEET	SIZE
STR-DWG-128	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Stainless steel 316L sheet 1 mm; flat bar 25 x 3 and 10 x 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand