



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA from TRL 3 model; regulatory ruling open	2026-09-25	AC

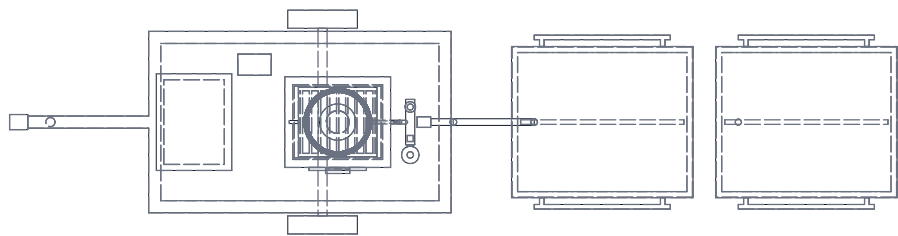


TOP VIEW
Scale 1:50

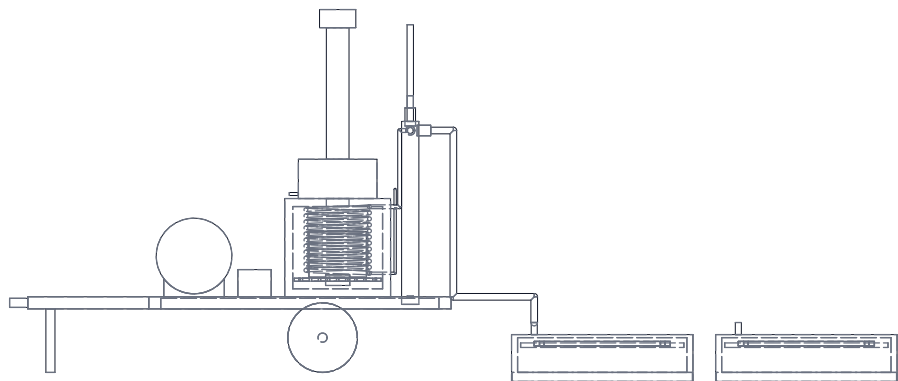

FRONT VIEW
Scale 1:50

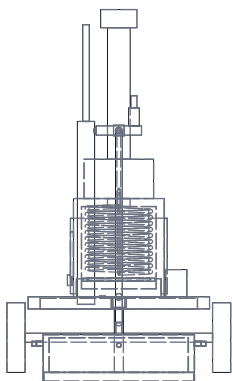

RIGHT VIEW
Scale 1:50

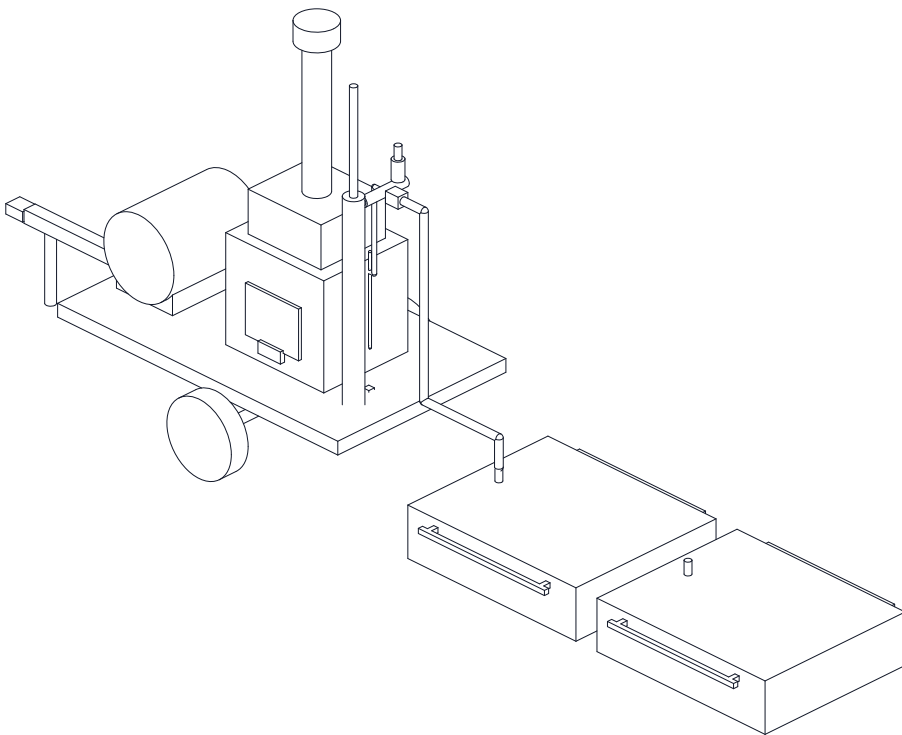

ISOMETRIC VIEW
Not to scale

ITEMS (BOM NUMBERS)

- 1 Trailer frame and drawbar; 2 Wheels (2)
- 3 Feed tank 125 L; 4 Feed pump 12 V
- 5 Firebox 700 x 600 x 650, 50 fiber lining
- 6 Coil 316 SS 25.4 x 1.65, 14.5 m, 11 turns
- 7 Economizer 520 x 460 x 260, 8 m tube
- 8 Chimney DN150, outlet 2.4 m, 6 mm mesh
- 9 Header DN50 at 1.60 m; seal 1.0 m; vent 2.3 m
- 10 Certified relief valve, 15 psi (1.03 bar)
- 11 Steam hose, 25 bore x 6 m
- 12 Hoods (2), 1200 x 1000 x 250, skirt 60

KEY DIMENSIONS AND NOTES

Overall, working position: 5.87 m long, 1.48 m wide, 2.46 m high (mm on sheet)
Deck 2000 x 1200 at 500 above ground; loaded mass 536 kg (CAL-001)
Normal pressure: header 0.033 bar, coil inlet 0.11 bar gauge; seal limit 0.094 bar
Steam side always open to the vent; diverter has no closed position; no isolating valve
Hose moved between hoods only after steam is diverted to the vent
Water in heated section 7.0 L flooded; 30 kg/h steam, 41 kW firing (CAL-001)
Firebox and chimney outdoors only; generator never inside a greenhouse
OPEN PREREQUISITE: written ruling from the local boiler authority
on this open-vented fired coil. No detail design or build before it.
Hood stowage for towing not yet resolved (see STR-PRC-001)

STEAMROOT

General arrangement, working position

DRAWING NO. STR-DWG-002			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:50	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES PRELIMINARY, NOT FOR FABRICATION. Boiler authority ruling OPEN (prerequisite)					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	