


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

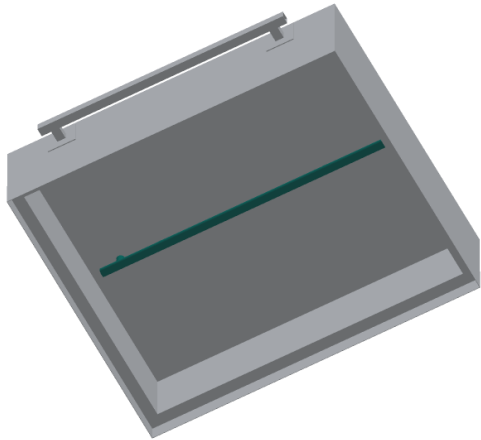

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Manifold: 30 OD stainless tube 1040 long, ends capped.

Drill 4 mm holes every 50 along the underside, in two rows 30 degrees each side of straight down (about 40 holes).

Riser: 30 OD tube 70 long welded upright into the manifold as a tee, 150 in from the hood end nearest the trailer.

Top flange: 3 mm plate, 70 round, welded to the riser; the steam coupling screws into the riser above it.

Two hanger straps 20 x 2 hold the manifold 15 below the inner skin.

Fit: the riser goes up through the hood; the flange is bolted on top with high-temperature sealant under it.

Check: blow through it: air comes out of every hole.

STEAMROOT

github.com/BoujeeEnjinia1701/steamroot

SteamRoot hood manifold and inlet (make 2): making sketch

DRAWING NO. STR-DWG-121			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Stainless tube 30 OD; plate 3 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	