


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

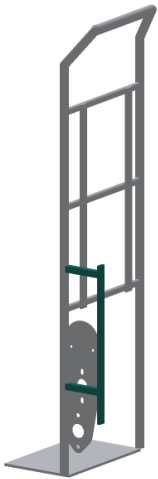

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Standoffs (make 4): cut 20 x 20 x 1.5 mm tube to 130 mm. Cope one end to fit the 28 mm rail (file to a 14 mm radius saddle).

Weld a 3 mm cap on the other end; drill 4.2 and tap it M5.

Weld each standoff square to the back of a rail, 140 and 510 mm above the shaft line, so the capped ends stand 100 mm behind the shaft line (90 mm to the cap face).

Skids (2): UHMW strip 25 x 10 mm cut to 500 mm. Countersink two holes 100 and 470 mm from the lower end; screw to the caps with M5 countersunk screws, heads below the skid face.

The skid runs from 40 to 540 mm above the shaft line.

Check: both skid faces in one plane, within 1 mm; the cluster turns past them with 15 mm or more to spare.

STEPCLIMBER

github.com/BoujeeEnjinia1701/stepclimber

StepClimber skid standoffs (make 4) and skids (2): making sketch

DRAWING NO. SCM-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel square tube 20 x 20 x 1.5 mm; UHMW strip 25 x 10 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand