

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

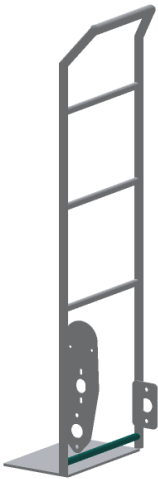

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Strip the bought frame: wheels, axle and axle brackets off.

Mark the shaft line on both rails, 142.5 mm above the toe plate.

Cut off any cross bar between 80 mm below and 360 mm above the shaft line (on the model frame, the bar 60 mm above it); grind the rails smooth and paint the bare steel.

Cut 22 mm tube to fit between the rails (372 mm inside); cope both ends to the 28 mm rails.

Weld it between the rails 105 mm below the shaft line, on the rail centre line, square to both rails.

The axle plates and skid standoffs then weld to the rails (sheets 101, 102 and 108).

Check: rails still 400 mm apart, within 1 mm, at the new bar.

STEPCLIMBER

github.com/BoujeeEnjinia1701/stepclimber

StepClimber frame changes and replacement lowest cross bar: making sketch

DRAWING NO. SCM-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel tube 22 x 1.5 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand