


CONCEPT, NOT FOR FABRICATION

StepCue · github.com/BoujeeEnjinia1701/stepcue

REV	DESCRIPTION	DATE	BY
P1	General arrangement for TRL 3 (STC-CAL-001)	2026-09-25	AC
P2	2.5 mm EVA base, 0.4 mm motor relief (STC-DDR-002)	2026-09-25	AC
P3	Design for construction (STC-DDR-003)	2026-10-01	AC
P4	Spline insole outline; pod R5 corners, parting groove	2026-10-02	AC

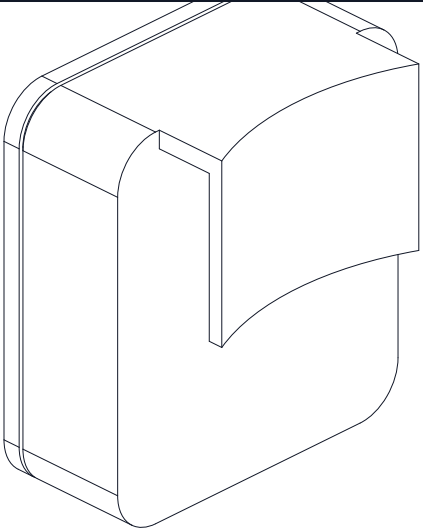

HEEL POD, ISOMETRIC

Not to scale; shoe omitted; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS (MM)

Insole 272 long (EU 42); stack 2.5 EVA + 0.3 carrier + 0.5 spacer + 1.2 cover = 4.5

Insole outline a smooth closed spline; traces 1.5 inside its edge

FSRs 18.3 dia x 0.46, 5 sites, tails on tab pads; 8 copper traces

Motor 10 dia x 2.7 in a through-hole at X 120, Y 16; under the spacer

Flex tail 8-way, 9 wide x 0.3, up the counter, over its top

Pod body 42 high x 37 wide x 15 deep; wall 1.5, lid 2.0, 4 M2 screws


Pod corners R 5; parting-line groove 0.5 x 0.5 on the base rim

Clip curved to the counter (R 32 inside): bridge 2, finger 1.5 x 18, 26 wide

Clip gap 3.8 fitted (counter 3.5 + tail), 2.8 free

Cell 5.2 x 25 x 35; module 4.5 x 17.8 x 21, USB-C down

Pause button cap 9.4 dia; LED window 3 dia

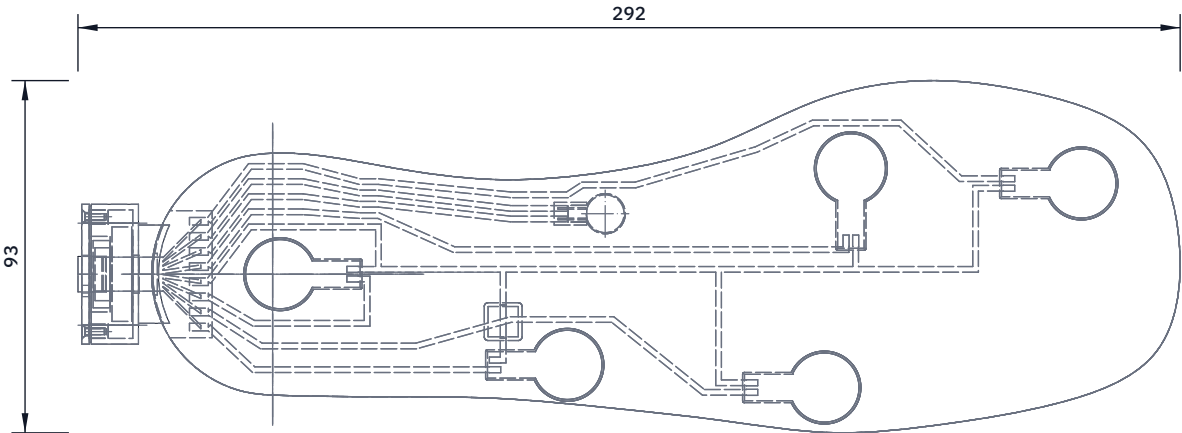


TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)

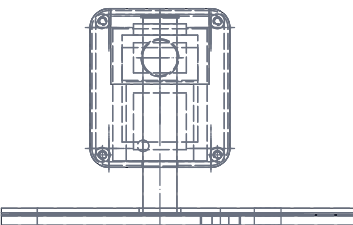

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

PARTS LIST (ITEMS MATCH BOM/BOM.CSV)

- 1 Top cover, PU foam
 - 2 Force-sensing resistors (5)
 - 3 Sensor laminate (carrier, traces, spacer)
 - 4 Flat flex tail and connector
 - 5 Coin vibration motor
 - 6 Insole base, EVA foam
- Not a medical device. Never charge while worn.

PARTS LIST, CONTINUED

- 7 Heel pod base with clip, PETG
- 8 LiPo cell, 400 mAh protected
- 9 Controller module with IMU
- 10 Interface board, pause button
- 11 Heel pod lid, PETG
- 12 Hardware: 4 M2 lid screws, tapes
- 13 Tail connector (on the interface board)
- 14 Spacer foam (part of item 3)

STEPUCUE

github.com/BoujeeEnjinia1701/stepcue

Insole and heel pod general arrangement

DRAWING NO. STC-DWG-001		REV P4	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Insole EVA, polyimide and PE foam laminate, PU cover; pod PETG; bought parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand