
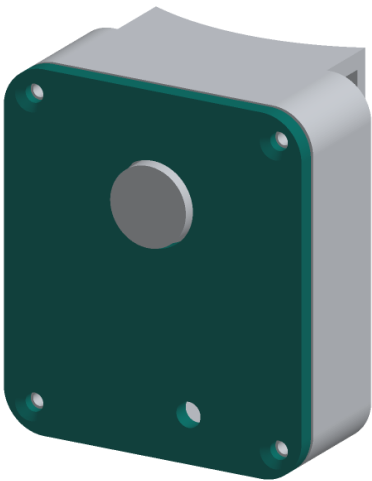
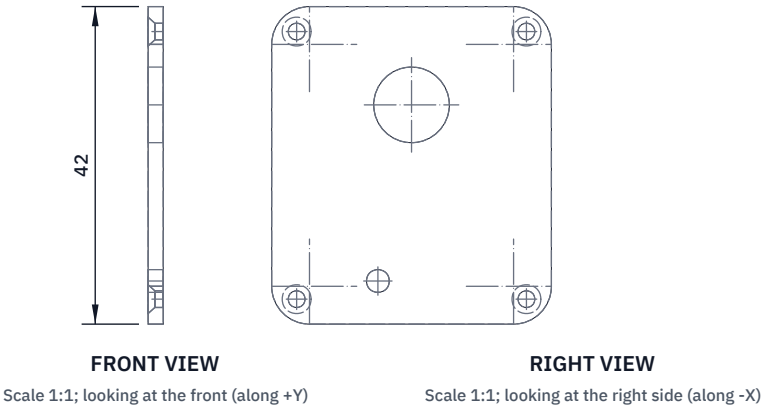


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	5 mm pod corners, parting-line groove	2026-10-02	AC

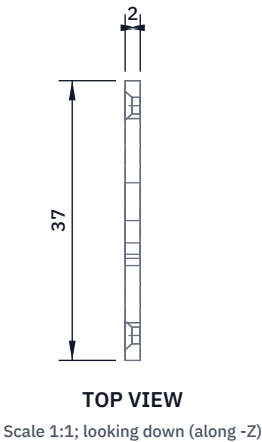

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print flat, 42 x 37 x 2 mm with 5 mm round corners, outer face on the bed (smooth face out).

Button hole 10 mm round, centred 29.0 mm up from the lower edge.

LED window 3 mm round, 5.7 mm up, 4.5 mm toward the outer side.

Four screw holes 2.2 mm, countersunk 3.8 mm, at the corners: 3.3 mm in from the long sides and 3.3 mm in from the short ends.

Break the outer edges 0.5 mm so nothing catches on clothing.

Fit: lies on the tray rim; the button cap passes through its hole with 0.3 mm all round; four M2 x 6 countersunk thread-forming screws into the bosses, heads flush.

Check: the cap moves freely; the lid sits flat with no gap.

STEPCUE

github.com/BoujeeEnjinia1701/stepcue

StepCue pod lid: making sketch

DRAWING NO. STC-DWG-107			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha	
MATERIAL / NOTES PETG, 3D printed flat, outer face down, 0.2 mm layers					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					
Generated from cad/src; do not edit by hand					