


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

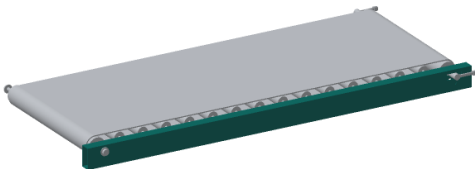

FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 1150 mm lengths of 60 x 30 x 2 RHS, square ends. Stand them on edge (60 mm tall). The right and left rails are mirror images.

Distances from the rear end; heights from the bottom face.

Rear axle slot through both side walls: 17 mm tall, 30 to 75 mm from the rear end, centred 42 mm up. Drill 17 mm at each end, saw out.

Front axle hole through both walls: 10.5 mm, 1100 mm from the rear end, 42 mm up; weld a 16 x 3 mm tube 26 mm long inside between them.

Inside wall: four 9 mm holes for M6 rivet nuts at 130, 430, 730 and 1020 mm, 25 mm up (carrier bars).

Top face: four 9 mm holes for M6 rivet nuts on the centre line at 90, 430, 770 and 1090 mm (side board spacers).

Right rail only: 8.5 mm hole through both walls at 50 mm, 22 mm up, and an M8 nut welded over it outside (drag screw).

Left rail only: 12 mm grommet holes in the outer wall at 60 and 1135 mm, 26 mm up (harness), and two M3 rivet nuts inside at 1092 and 1108 mm, 16 mm up (sensor bracket). Full layout: picture rail-holes.png.

STEPGEN

github.com/BoujeeEnjinia1701/stepgen

StepGen deck rail (make 2, a right and a left): making sketch

DRAWING NO. SGN-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel RHS 60 x 30 x 2 mm, S235 class, 1150 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand