



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

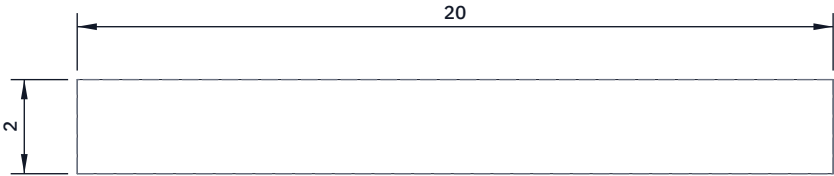

TOP VIEW

Scale 5:1; looking down (along -Z)

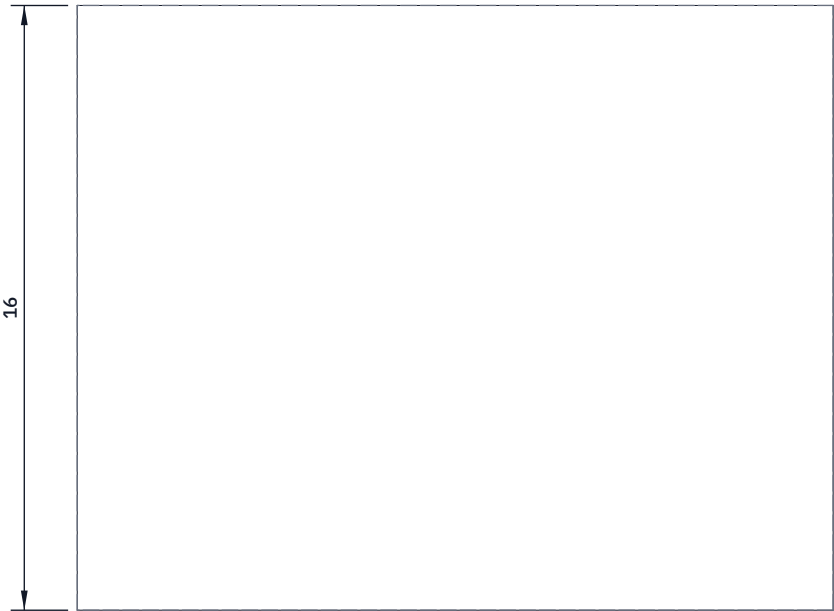

FRONT VIEW

Scale 5:1; looking at the front (along +Y)



RIGHT VIEW

Scale 5:1; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut a 20 x 16 mm piece of 2.5 mm aluminium plate.
Two 3.2 mm holes, 2 mm from the short edges, 3 mm up from the bottom.
Glue or screw the Hall sensor to its face, centred 11 mm up, sensing face outward, 3 mm proud of the bracket.
Fit: on the left rail's inside wall, centred under the front axle, bottom 13 mm above the rail's underside, with two M3 screws into rivet nuts. The sensor then faces the magnet ring on the roller end 18 mm below the axle, with a 1.5 mm air gap.
Check: turn the roller by hand; the sensor light (or a meter) shows 8 pulses per turn.

STEPGEN

github.com/BoujeeEnjinia1701/stepgen

StepGen Hall sensor bracket: making sketch

DRAWING NO. SGN-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 5:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium plate 2.5 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand