



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

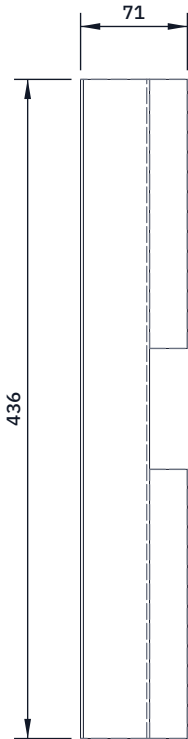

TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut a blank 436 mm wide by 153 mm; cut an 80 mm wide notch 25 mm deep in the middle of one long edge (it clears the down tube).

Fold the 25 mm flanges either side of the notch by 110 degrees, so the guard leans back 20 degrees when the flanges lie flat.

Flanges: four 6.5 mm holes, 80 and 180 mm each side of centre, 12 mm from the fold (M6 screws into the nose beam's rivet nuts).

Round the top corners to 10 mm; deburr all edges.

Fit: on the nose beam's top, its fold on the beam's rear edge; its top edge is 120 mm above the beam, over the front end of the belt.

Check: 15 mm or more from the belt; 2 mm or more from the front cover.

STEPGEN

github.com/BoujeeEnjinia1701/stepgen

StepGen toe guard: making sketch

DRAWING NO. SGN-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 2 mm, 5052 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand