



PRELIMINARY, NOT FOR FABRICATION

StillStack · github.com/BoujeeEnjinia1701/stillstack

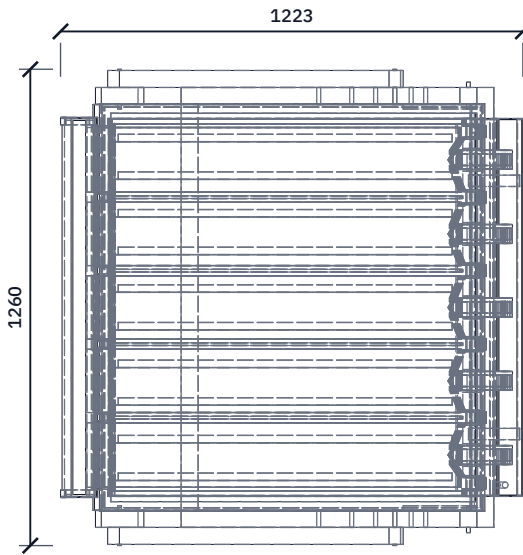


TOP VIEW

Scale 1:20; looking down (along -Z)

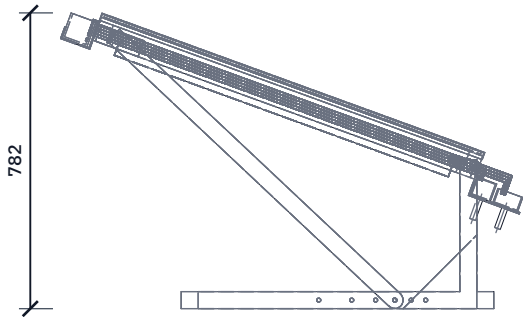


FRONT VIEW (SIDE ELEVATION)

Scale 1:20; looking at the front (along +Y)

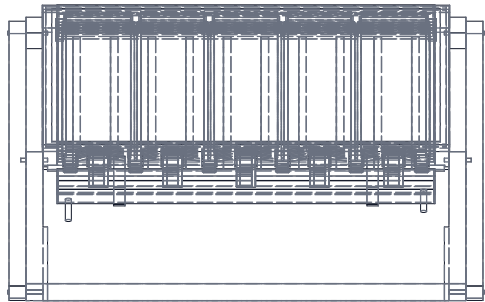


RIGHT VIEW (FROM LOW EDGE)

Scale 1:20; looking at the right side (along -X)

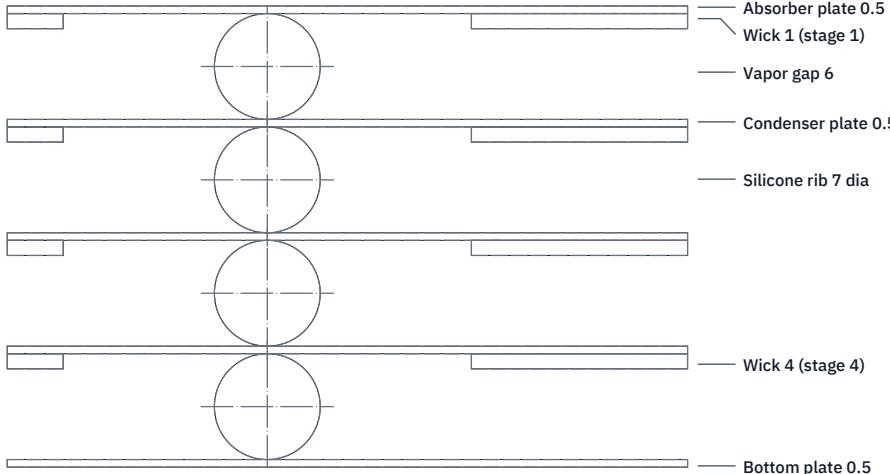

DETAIL A: STACK SECTION AT A RIB

Scale 2:1, looking up the slope

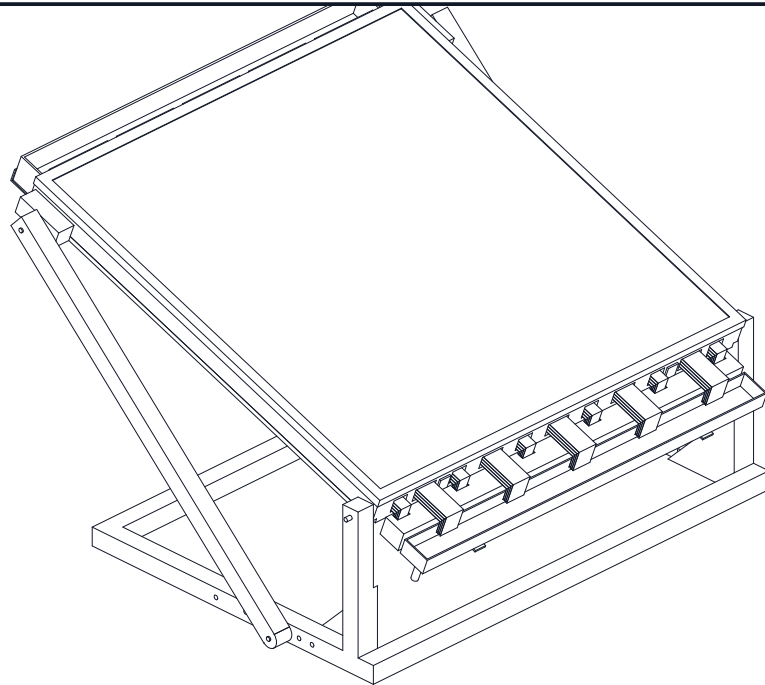


ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS AND FIGURES (SSK-CAL-001)

Aperture 1.0 x 1.0 m; tilt 20 deg, stand 10 to 35 deg
4 stages; 6 mm vapor gap; 1 mm wicks; 0.5 mm plates
Ribs: 4 per gap at 194 mm pitch; sag 0.5 mm
Dry breaks 10 mm each side of ribs and rails
Air gap 25 mm; 6 mm twin-wall PC glazing
Frame 12 mm plywood + 25 mm stone wool; 1,074 mm square outside
Front pivot bolts; props pinned at 6 holes
Design day: about 10.6 L/day, GOR about 1.3
Dry stagnation: stage 1 about 140 C (144 C calm)
Stages 1, 2 rated 150 C; cover (BOM 14) not shown
Panel about 18.7 kg dry, 22.7 kg wet
Fasteners not shown; see build plan SSK-BLD-001

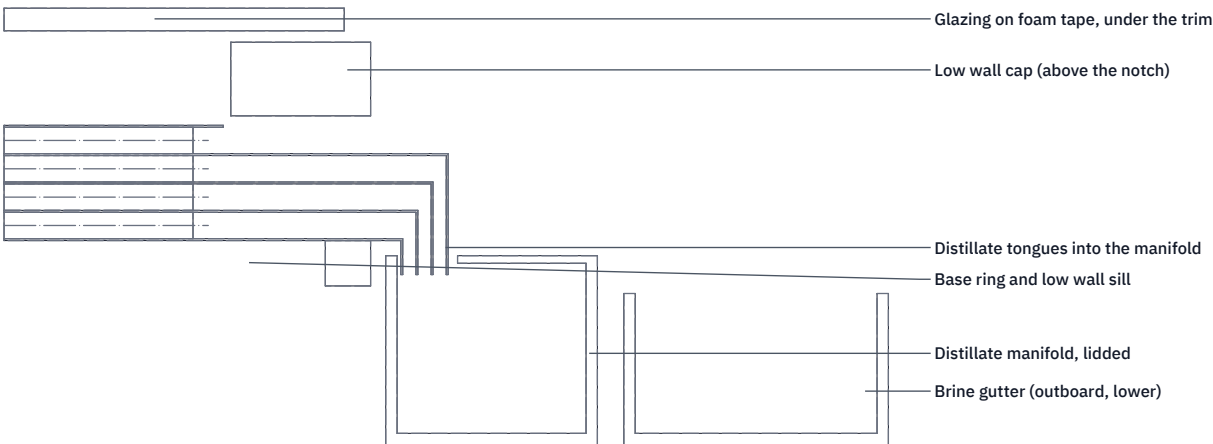

DETAIL B: LOW EDGE, DISTILLATE AND BRINE

Scale 1:2, untilted; cut on a rib line

STILLSTACK

github.com/BoujeeEnjinia1701/stillstack

General arrangement

DRAWING NO.

SSK-DWG-002

REV

P4

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

See bom/bom.csv. Plates 0.5 mm aluminum; rails PPS (stages 1, 2) and PC; wick clips stainless; ribs silicone; frame plywood, stone wool

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand