


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Slots for the bottom plate's lip tabs (SSK-DEC-001)	2026-10-02	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

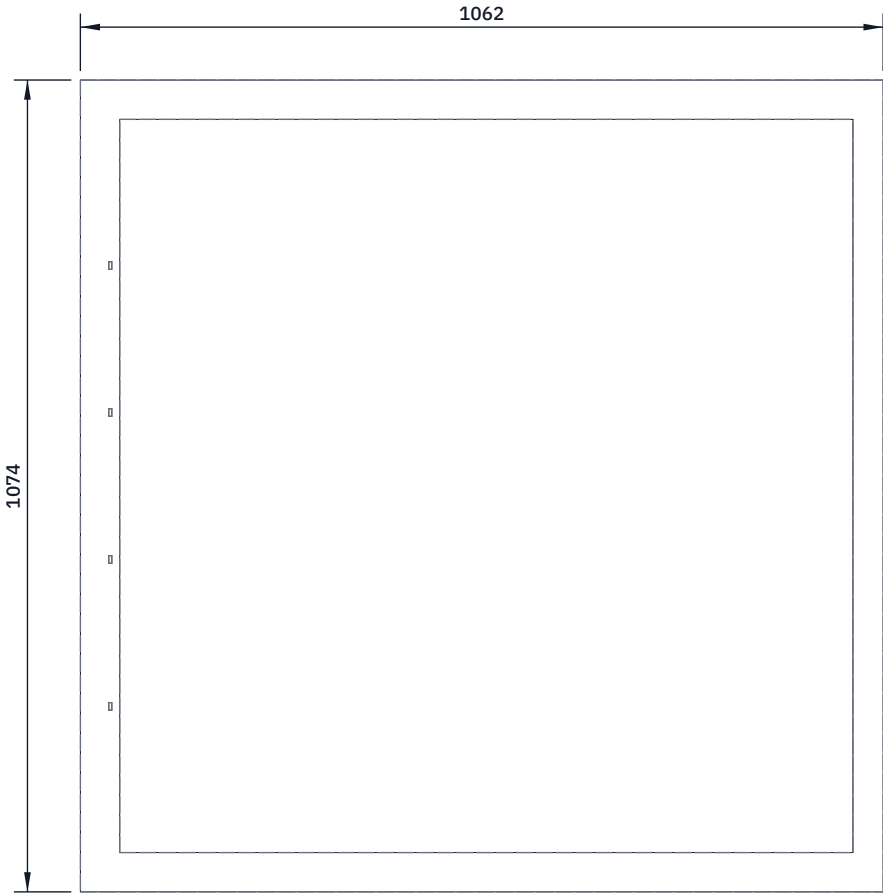


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

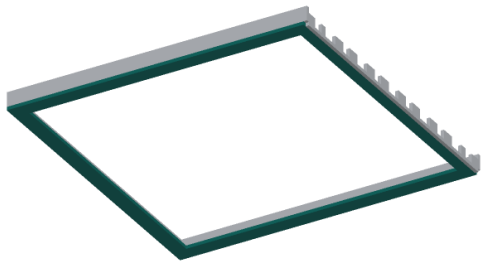

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Four strips of 12 mm plywood, laid flat under the walls:
two side strips 1,062 x 52 mm (flush with the outside of the side walls and the high wall, stopping at the low wall's inside face);
high strip 52 x 970 mm; low strip 40 x 970 mm, between the sides.
High strip: four 4 mm wide slots 5 mm deep cut down from its top face, 1.5 mm clear either side of each lip tab of the bottom plate (at the rib lines, from the centre line: 97.2 and 291.6 mm each side).
Each strip reaches 15 mm past the liner into the aperture: this ledge carries the edges of the bottom plate and the side rails.
The low wall comb stands outside the low strip, its sill level with it.
Fit: glue (exterior PU) and screw up into the wall bottom edges, 4 x 40 mm screws every 150 mm, pilot drilled 2.5 mm.
Check: the inner ledge edges form a 970 mm square within 1 mm and lie flat (no step over 0.5 mm at the joints).

STILLSTACK

github.com/BoujeeEnjinia1701/stillstack

StillStack base ring (4 strips): making sketch

DRAWING NO. SSK-DWG-104			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Exterior plywood 12 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand