


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

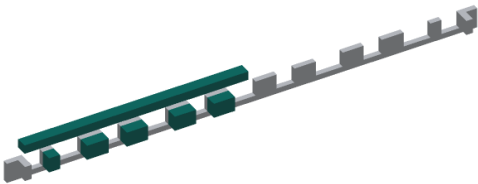

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut with a long bread knife or a fine saw; wear gloves, a dust mask and glasses. Foil face toward the stack.

Side pieces 1,050 x 52.5 mm; high piece 1,000 x 52.5 mm with the same five openings as the high wall.


Low end: ten blocks 33 mm tall that fill the spaces between the low wall's notches (the end ones stop 15 mm short of each side, for the stop blocks), and a cap piece 1,000 x 19.5 mm.

Drawn: the right half, cap lifted 30 mm; the left is a mirror image.

Glue each piece to its wall with high-temperature silicone.

Pockets: cut a 30 mm hole 10 mm deep behind the pivot and prop hinge holes in the side pieces for the nut and washer.

Check: the foil face is unbroken except at the openings.

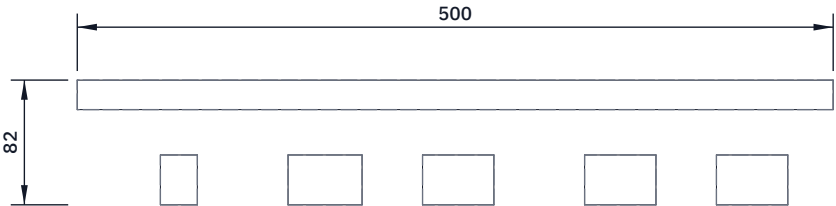

TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

STILLSTACK

github.com/BoujeeEnjinia1701/stillstack

StillStack stone wool liner, low end pieces: making sketch

DRAWING NO. SSK-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Foil-faced stone wool board 25 mm, rated well above 150 C					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand