




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	PPS named for the stop block (SSK-DEC-001)	2026-10-02	AC

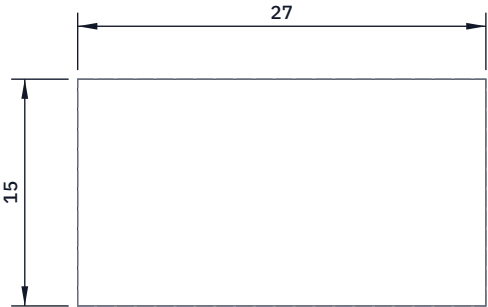


TOP VIEW
Scale 2:1; looking down (along -Z)

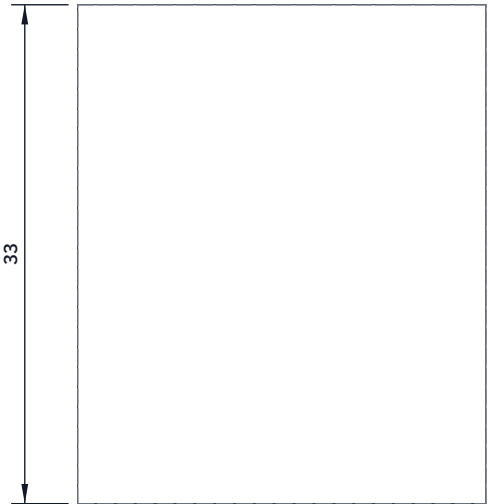

FRONT VIEW
Scale 2:1; looking at the front (along +Y)

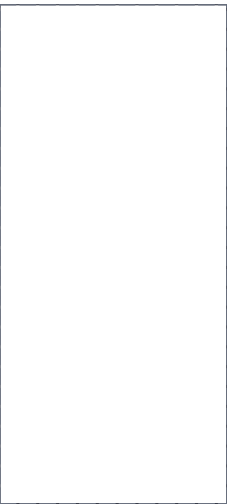

RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

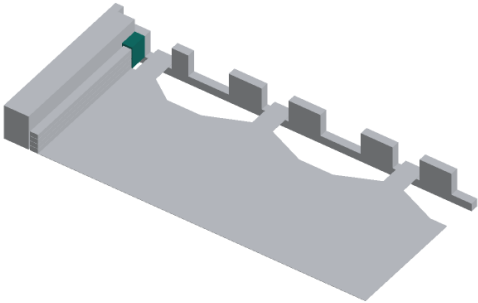

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut a block 27 x 15 x 33 mm from the offcut of the 7 mm PPS sheet the stage 1 and 2 rails come from (or glue two pieces together).
It fills the low corner of the liner: its back face against the low wall comb, its side against the side liner.
Its front face is the stop the whole stack bears on: the plate corners and the rail ends touch it, 498 mm from the centre.
Fit: high-temperature silicone on the back and side faces.
Check: the front faces of the two blocks are square to the side walls and 996 mm from the high liner face (plates' length).

STILLSTACK

github.com/BoujeeEnjinia1701/stillstack

StillStack stop block (make 2): making sketch

DRAWING NO. SSK-DWG-106			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha	
MATERIAL / NOTES PPS, natural (tan), the stage 1 and 2 rail polymer, rated above 150 C					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	