
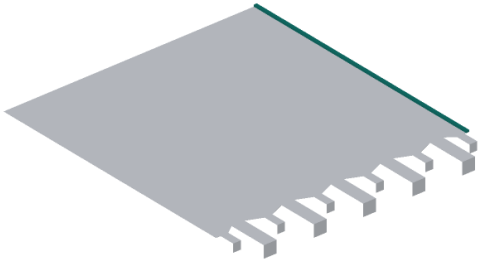



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	PPS named for stages 1 and 2, teal PC for stages 3 and 4 (SSK-DEC-...	2026-10-02	AC

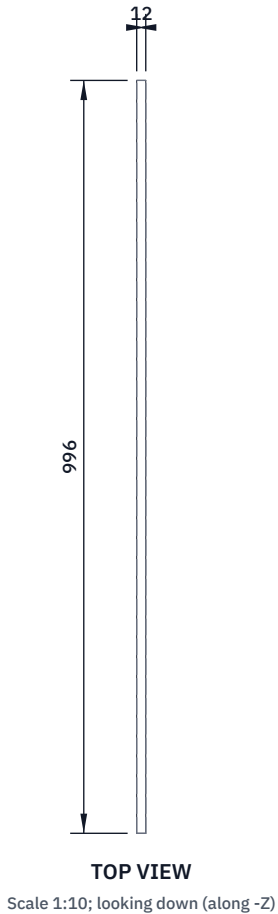

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Eight rails, 996 x 12 x 7 mm, two per stage.

Stages 1 and 2 (the top two gaps): cut four strips 12 mm wide from 7 mm natural (tan) PPS sheet; keep the offcut for the stop blocks.

Stages 3 and 4: print four rails in teal polycarbonate in four 249 mm sections each, butt-joined with high-temperature silicone.

Mark each rail with its stage number on the outside face; stages 1 and 2 must never swap with 3 and 4.

Fit: each rail lies along a side edge of the plate below, flush with it, and its low end touches the stop block.

The wick strips stop 10 mm short of the rail (dry break).

Check: 7.0 mm thick within 0.2 mm along the whole length.

STILLSTACK

github.com/BoujeeEnjinia1701/stillstack

StillStack side rail (make 8): making sketch

DRAWING NO. SSK-DWG-109			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha	
MATERIAL / NOTES Stages 1, 2: PPS, natural (tan), above 150 C. Stages 3, 4: printed PC, teal					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	