
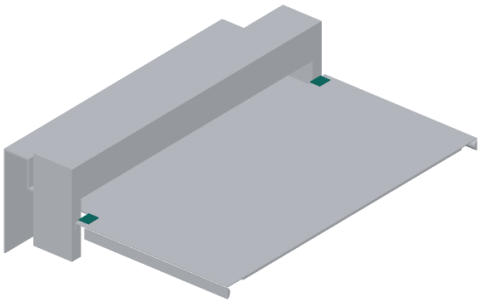


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

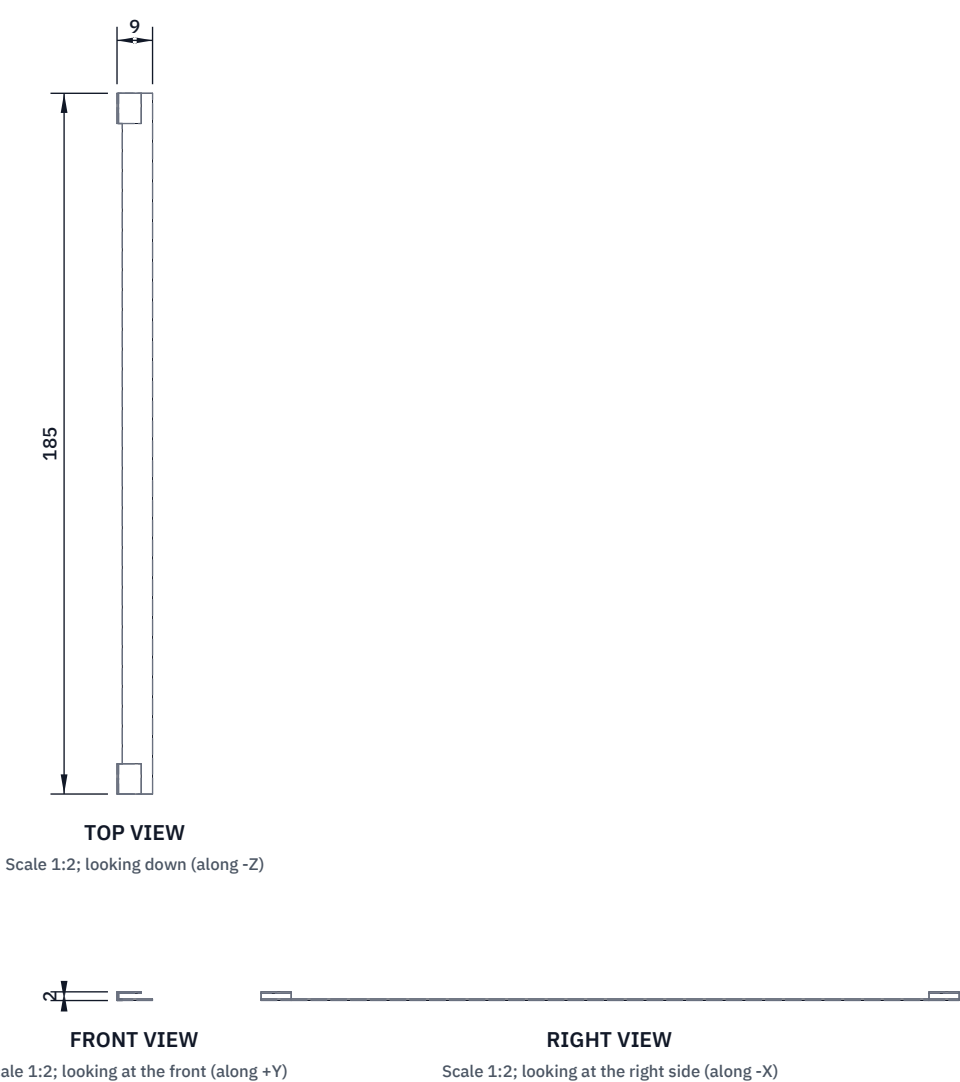

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 20 lengths of strip: 206 mm for the three 167 mm wide strips of a stage, 4 mm more for the two 171 mm ones; ends filed.

Mark the bar: 185 mm in the middle (the strip's width plus 9 mm past each edge). Beyond each bar end the strip makes three folds: first out 1.4 mm under the plate's high edge, then up 2.3 mm along the edge, then 6 mm flat over the plate's top face.

Fold each in a vice between two steel plates, springing the flap about 5 deg tighter than square so it grips the plate.

Fit: the bar lies under the wick strip, 1 to 9 mm in from the plate's high edge; each ear sits in the 8 mm dry break beside the strip, with the flap flat on the plate's top, clear of the rib and the lip tab.

No adhesive: the clip is slid on from the high edge and lifts off.

Check: the wick is pressed flat to the plate; no clip part touches a rib, a lip tab or the liner (1.5 mm to the nearest).

STILLSTACK

github.com/BoujeeEnjinia1701/stillstack

StillStack high-end wick clip (make 20): making sketch

DRAWING NO. SSK-DWG-119			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES 304 stainless strip 0.4 x 8 mm (food contact)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand