


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

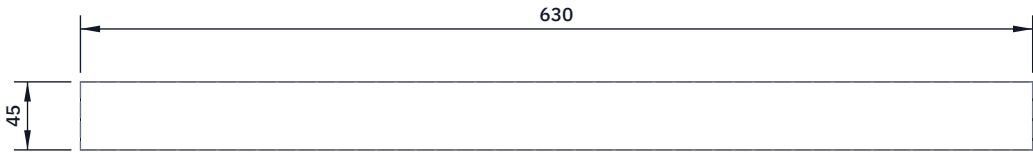

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

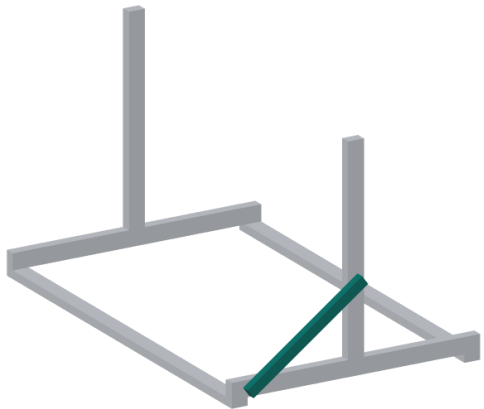

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make four. Cut 630 mm of 45 x 35 mm timber, ends square.
Two 10.5 mm holes through the 35 mm way, 585 mm apart, 20 mm and 25 mm in from the ends, on the centre line.
Drill the four together clamped in a stack so they match.
Fit: the 45 mm face lies flat on the upright and the side rail.
On each upright the front brace is on the outer face and the back brace on the inner face; one M10 bolt goes through both braces and the upright at 520 mm above the ground.
The foot bolt goes through the brace and the side rail.
Check: with both bolts in, the upright stands plumb within 2 mm.

SUNCLAVE

github.com/BoujeeEnjinia1701/sunclave

SunClave brace (make 4): making sketch

DRAWING NO. SCL-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Treated timber 45 x 35 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	